

**Balers**

RV 5100 Plus,  
RV 5200 Plus, FlexiWrap



# High Performance Variable Chamber Balers



*My way of Farming!*







# ADD VALUE TO YOUR FORAGE

*My way of Farming!*



Working the land, running my farm and connecting with nature. Farming is my way of living, and despite being rough at times, I never grow weary of everyday tasks of attending to my land and livestock. I keep up with developments by staying loyal to personal philosophies and applying the appropriate strategy.


I shape and influence my own future by combining craftsmanship with modern technology, employing the very best machinery. I actively seek new opportunities, by being innovative in my way of working. I work hard to grow a good crop. I am passionate about my livestock, providing my animals with only the best. My farm and its returns, reflects who I am, because my heart and soul is put into the work I do.

Farming is about passion, about growing and developing, my crop, my farm, myself, **my way**.



# Variable Chamber Baler: up to 2m diameter bales

## *What are the requirements for your crops?*

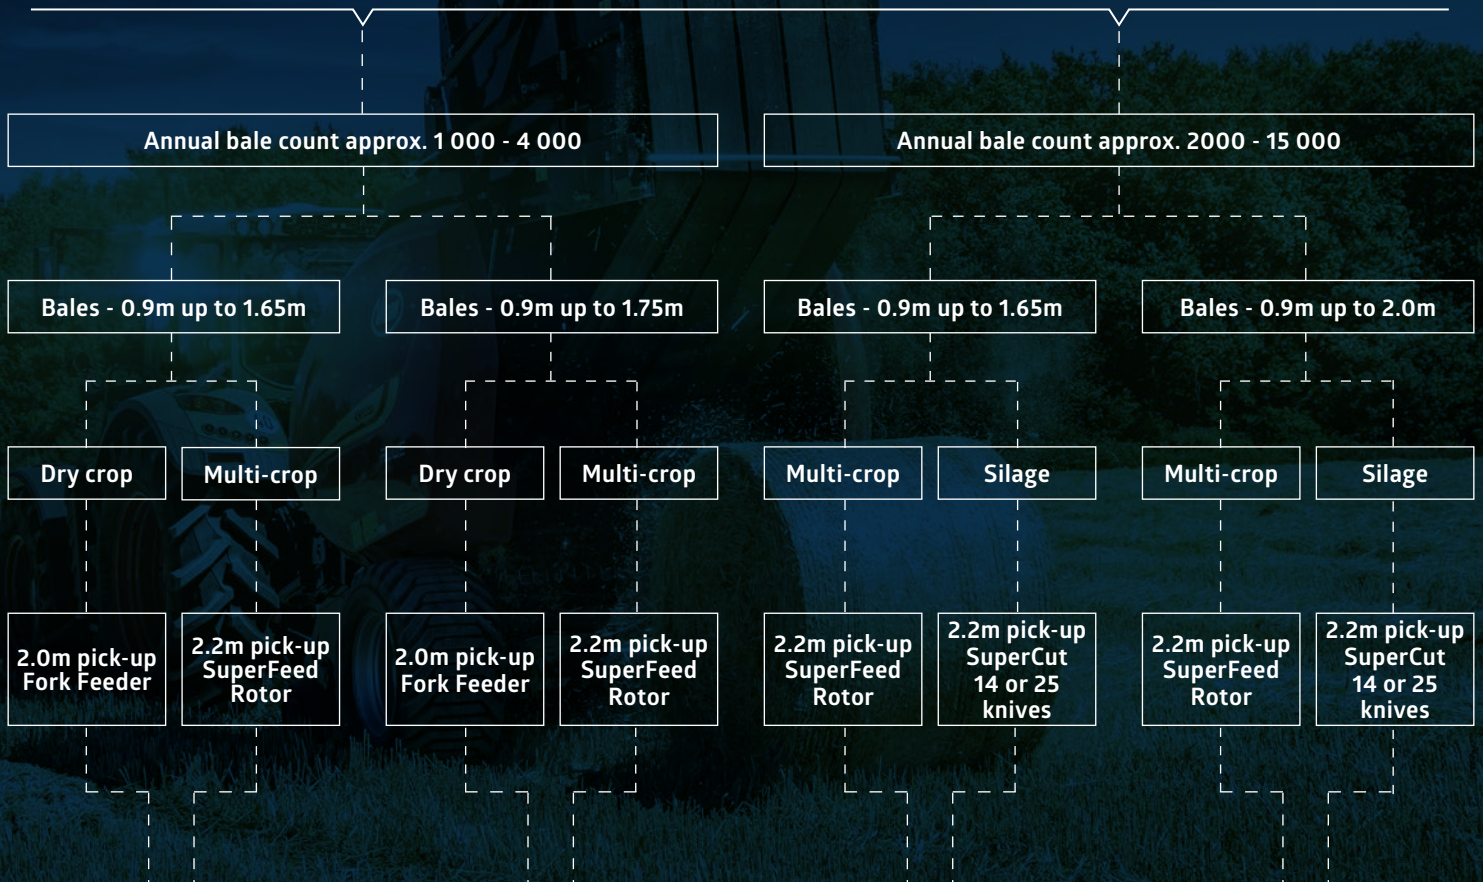

**RV 5116 Plus**

The mixed chamber concept ensures smooth bale rotation with reduced crop losses. Available with a choice of fork feeder or rotor intake systems. Bale diameter 1.65m/1.75m



**RV 5118 Plus**



**RV 5216 Plus**

Smart 'Intelligent density' allows bales to be tailored perfectly to match all requirements. Available with a choice of rotor and 14 or 25 knife SuperCut. Bale diameter 1.65m/2.00m



**RV 5220 Plus**



Superb capacity and fantastic bale quality are hallmarks of Vicor variable chamber balers.



## Vicon RV 5000 Plus Series *Unmatched Bale Quality*

### **Bale Production on a New Level**

The latest Vicon Plus series RV balers combine profitable high output performance with market leading bale density. They benefit from a range of upgrades designed to boost output and reduce maintenance requirements, keeping operating costs to a minimum.

With true multi-crop performance in silage, hay and straw, they incorporate a host of features to make your working day more profitable.



## Clean Up *with Vicon*



Re-designed large diameter roller crop press facilitates crop flow at high intake speeds.

### **High Capacity Pick-Up**

Wide 2.2m low profile pick-up provides clean raking performance at the highest working speeds in even the toughest of working conditions.

### **Renewed reliability**

In addition to their outstanding performance, Vicon RV Plus series pick-ups have a strong reputation for reliability, which has now been further enhanced with an upgraded driveline.


With a superior specification compared to competitive machines, Vicon set new standards for performance: Each tine bar is supported on multiple bearings, while all 2.2m pick-ups feature twin cam tracks – a truly great combination that gets your crop off the ground with minimal maintenance during long working days.

### **New upgraded 'PLUS' series specification**

New 10mm longer pick-up tines and wider galvanised strippers which provide more effective cleaning, give a boost to performance in wet crop conditions.

### **Compact transport width**

No need for the pick-up wheels to be removed or folded for transport, Vicon's unique compact internal drive system is a smart solution that reduces unproductive time between jobs.

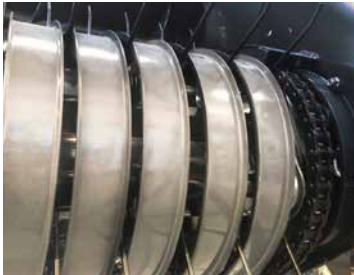

Patented internal drive system.



2.2m Pick-up.



Large diameter easily adjustable guide wheels.

#### **2.00m wide pick-up (Fork feeder model)**

- Four tine bars each supported on three ball bearings
- Extra close 60mm tine spacing
- Innovative inboard driveline design for reduced transport width
- Crop deflector for efficient crop flow
- New  $\frac{3}{4}$ " HBC Spec drive chains

#### **2.2m extra wide pick-up (Rotor intake & double fork feeder models)**

- Five tine bars with 32 tines per bar
- Each tine bar supported by four bearings along its length
- Cam track located at both ends of the pick-up
- Large diameter roller crop press for increased intake speeds
- Innovative inboard driveline design for reduced transport width.
- No need to remove pick-up wheels for road transport
- New  $\frac{3}{4}$ " HBC Spec drive chains

**“Clean raking  
performance  
in all crop”**






# Effective intake

## *Superior capacity*

*Choice of Intake Systems – With a variety of intake systems available, you can be sure there is one ideally suited to your workload. Each intake option has been perfectly matched to ensure optimal feeding of crop to the bale chamber to maximise capacity and enhance the bale formation process.*



Single fork feeder.



Dual fork feeder.

### **Fork feeder intake system**

RV 5100 models can be specified with a cost efficient fork feeder intake system. This provides direct feed transfer into the bale chamber. The wide opening allows high intake capacity, while also providing gentle handling of leaf loss sensitive crops.

Single and dual fork feeder intake systems are equipped with a crop press to maximise crop flow and are particularly suited for fragile crops such as Clover and Alfalfa.

### **DuoFeed double fork feeder**

Optional DuoFeed with its double feed tines ensures high capacity and output, while still safeguarding fragile crop types.

### **Crop press for maximum capacity**

All 'PLUS' series models with PowerFeed and SuperCut intake feature a revised roller crop press with increased range of movement, stronger side arms and internal roller bearings for increased protection.

### **RV 5116 & RV 5118**

Plus Series models are available with a choice of Fork feeder or PowerFeed intake rotor.

### **RV 5216 & RV 5220**

Plus Series models are available with a choice of PowerFeed or SuperCut intake systems.







PowerFeed intake system.

#### PowerFeed intake

The Vicon PowerFeed intake rotor provides huge feed capacity, handling both wet and dry crops in all conditions. The PowerFeed rotor with its 14 fully guided rotor tines forces crop into the bale chamber for higher intake speeds and instant bale rotation.



SuperCut-14.

#### SuperCut 14

The SuperCut 14 knife chopping system provides fast and efficient crop flow into the baler. With a chop length of 70mm it is the ideal solution for producing tight, dense bales, for improved fermentation and easier feeding with less wastage. Each individual knife is spring protected against foreign obstacles, with automatic reset.



SuperCut-25.

#### SuperCut 25


The SuperCut 25 knife pre-chopping system with a chop length of 40mm provides the ultimate solution for maximising silage quality. Group selection with choice of 25, 13, 12, 6 or 0 knives, gives maximum flexibility of operation.

#### Dual action knife protection


The SuperCut 25 knife system is equipped with dual protection against obstacles. If a small obstruction hits a knife, it can pivot backwards without losing cut quality. If a larger obstacle is encountered, the knife pivots downwards, automatically resetting afterwards.

#### Parallelogram DropFloor system for easy unblocking


PowerFeed and SuperCut intake systems are equipped with the super effective Parallelogram drop floor system, which brings faster and easier clearing of blockages. The system not only lowers the rear edge of the drop floor as per traditional systems, but also lowers the front section of the floor, where a blockage is more likely to occur.

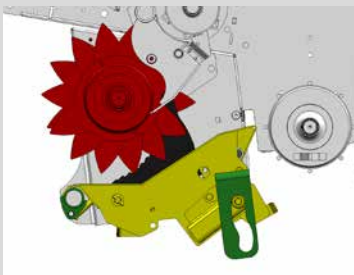

Drop Floor in working position.

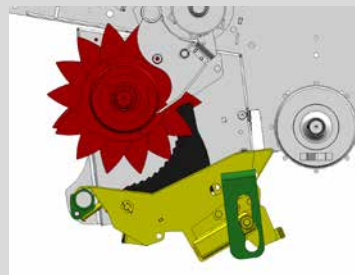

Drop Floor in mid position.

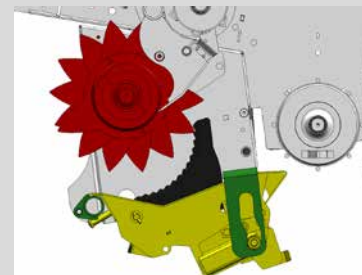

Drop Floor in fully lowered position.

**Easier removal of all blockage types = More productive time spent baling**



# Driveline *for the toughest conditions*





*In today's world no-one can afford downtime. In a busy baling season timeliness is everything. To guarantee the lowest possible running costs, the Vicon engineering team have boosted durability to new levels.*



#### **RV 'PLUS' series – designed for the toughest conditions**

Drive to the bale chamber is by oversize 1¼" HBC specification chain which provides higher fatigue strength & increased wear resistance. Bale chamber driven rollers feature cast bearing housings and are greasable, while a rugged new design of Idler roller incorporates a 45% increase in bearing diameter, a larger internal grease capacity and improved shielding.

#### **Steel hydraulic pipes for ultimate reliability**

Every step has been taken to maximise reliability. Rubber hoses have been eliminated from the hydraulic system wherever possible and replaced with steel pipes for ultimate durability.

#### **Automatic chain lube for extended life**

Correct lubrication of chains is crucial to extended lifetime. Vicon RV PLUS series balers are equipped with an automatic system supplying oil to each individual chain. The system is equipped with a generous four litre capacity tank, while the quantity of oil delivered to each outlet can be individually finely tuned to vary the amount of oil provided.

**“Steel pipes**  
for ultimate  
durability”

#### **High level LED Lights**

New high level LED road lights mounted up out of harm's way for reduced likelihood of damage from stray bales.





# Intelligent Density 3D – *The Smartest Way to Perfect Bales*







Intelligent Density 3D

**Every crop is different and with Vicon Intelligent Density 3D you can be sure to obtain the best possible end result – optimal feed quality for your livestock!**

#### Intelligent Baling

Intelligent Density 3D gives you three pre-selectable options for straw, hay and silage all easily set from the control box.

It is also possible to customize the bale density yourself. Three separate zones, each with a choice of diameter and pressure let you set the best strategy, so that bale structure is perfectly matched to your requirements.

With three pre-selectable bale density settings **Intelligent Density 3D** makes it very easy to choose the correct bale density in different crops.



Baling dry straw and want the heaviest bales possible? Maximum pressure is set in every zone.


Baling hay? Soft centre core to let the bale breathe is set, with gradually increasing pressure towards the outer layer.

Baling wet silage? Pressure is reduced in the centre and mid zones.

**“Customize the bale density yourself”**

Pre-selection of bale density for each zone of the bale: core, mid and edge.

Diameter (D) and pressure (P) can be adjusted in three stages using the control terminal.

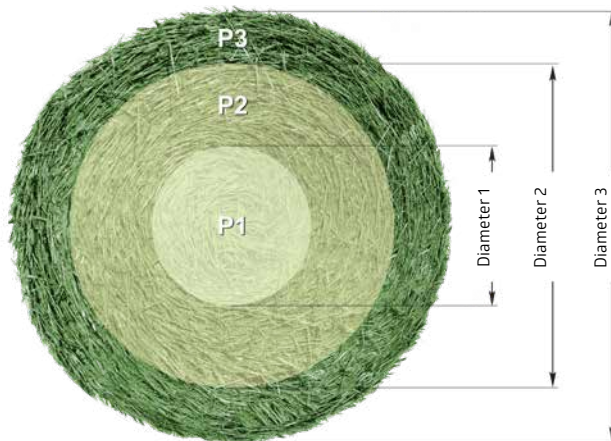



## PowerBind: *Great Looking Bales – Time after time*



With a Vicon RV baler you're sure to leave a field of great looking bales. Vicon's PowerBind net and twine systems ensure neat, tightly wrapped bales.

### **Fast Acting Net Cycle**

Vicon RV balers are equipped with the innovative front mounted PowerBind net system. PowerBind eliminates troublesome feed rollers and has market leading cycle time.

### **Minimum Time Stationary – Maximum Time Baling**

The net is continuously retained in the PowerBind injection arm. When the bale is complete, net is fed directly onto the bale in a flat movement angle keeping the net tight at all times,

providing accurate and extremely reliable net injection, without influence from wind or crop build-up.

### **Low Net Loading Height**


PowerBind offers very low loading height for maximum convenience and time saving. To replace the empty roll just swing out the shaft and slide in a new roll.







The PowerBind net wrap system allows the net to extend past the edge of the bale.



Convenient easy access storage for net and twine for long working days.



Storage for up to eight balls of twine.




The very low loading height and the very easy threading of the system mean minimum downtime and maximum time baling.

**“Rapid Binding**  
– with easy  
low level  
loading”



#### Twine tying

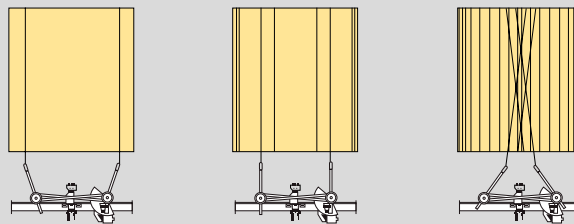

Automatic twine tying with the fast acting double tube system means simultaneous binding of both edges of the bale, reducing binding time to a minimum. Over crossing of twines in the centre of the bale provides no loose ends at the end of the binding cycle. The system is fully user programmable to make sure you make the best looking bales in all crop conditions.



# Setting and Control

## *In Comfort*



### Easy to Use Control Systems

RV 5000 Plus series variable balers feature a simple to use control system designed to make long working days as relaxing as possible. Clear colour screen displays with simple graphics show baling information at a glance, with all important settings made from the comfort of the tractor seat.

### ISOBUS (option)

All models can be optionally specified with full ISOBUS compatibility for direct connection to an ISOBUS tractor, enabling the baler to work through the tractor terminal. In addition to direct connection to the tractor, ISO specified machines can also be supplied with either Tellus GO+ or IsoMatch Tellus Pro touch screen terminals.

### Focus 3

Designed for easy operation with the following functions operated from the terminal:

- Bale diameter adjustment
- Display of current bale diameter
- Left & Right driving indication
- Selection of net or twine tying
- Net and twine quantity adjustment
- Tying information during tying cycle
- Selection of manual or automatic tying
- Five daily bale counters & total bale counter
- Bale density adjustment
- Selection of knives, drop floor or pick-up (when present)



Focus 3 terminal.

## “Everything under Control – with ISOBUS Technology”



Tellus GO terminal.



IsoMatch Tellus terminal.



### IsoMatch (Multi)Eye

IsoMatch Eye and MultiEye are accessories for connecting up to four cameras to any IsoMatch terminal.

### IsoMatch Tellus GO+\* – Compact ISOBUS terminal

IsoMatch Tellus GO+ is a full ISOBUS terminal. The compact design makes it easy to integrate in the tractor cab. Tellus GO+ is equipped with a 7-inch touch screen with hard keys combined with a rotary switch for direct access to main functions.

(\*) These fully ISO terminals can be fitted on variable chamber balers, provided units are factory ordered with ISOBUS compatibility option.

### IsoMatch Tellus Pro terminal\*

The IsoMatch Tellus Pro is a virtual terminal combining two Interface screens in one terminal. The 12" touch screen offers ergonomic use and is designed for clear viewing during long days of operation.

With an ever increasing number of functionalities, such as rear view cameras, the Tellus Pro terminal allows the baler interface to be viewed in the top screen, with a camera display to monitor finished bales active in lower part.



# TechnoPack (option) *get to know more about your bale*




*The optional TechnoPack offers professional farmers and contractors the optimal solution in terms of crop harvesting management.*

#### TechnoPack

The moisture level of crop entering the bale chamber during the baling process is continuously measured and displayed on the baler terminal.

A sensor plate is mounted in the lower part of the bale chamber, from which the system calculates the percentage of moisture inside the bale. The system is able to detect moisture levels up to 50% allowing the driver to decide at any time if crops such as hay or straw are fit to bale - your assurance of always preserving the best possible forage quality.

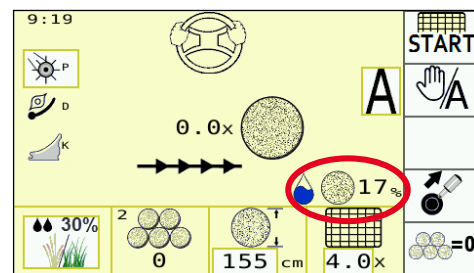

#### Bale ramp sensor

Also included in the TechnoPack is a bale ramp sensor which gives a signal when the discharged bale is clear of the bale ramp.

#### Moisture measurement

For added operating convenience the TechnoPack gives continuous real time readout of crop moisture level during baling. During the binding cycle the average moisture content for the completed bale is displayed.



“**Average moisture content for completed bale is displayed**”




# TIM Baler (option)


## *The implement controls the tractor*



### Fewer actions during baling

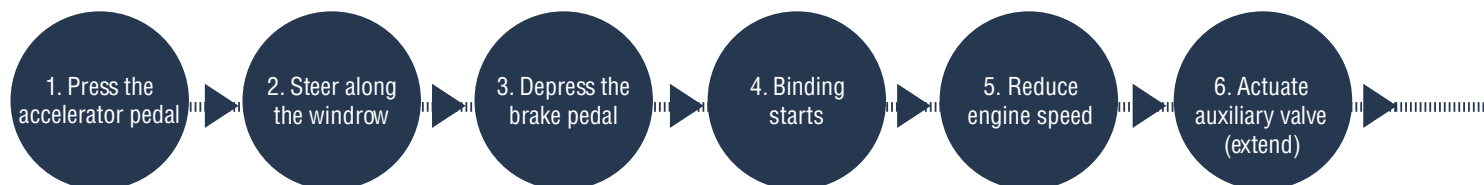

Process sequence for standard operation: 10 steps per bale

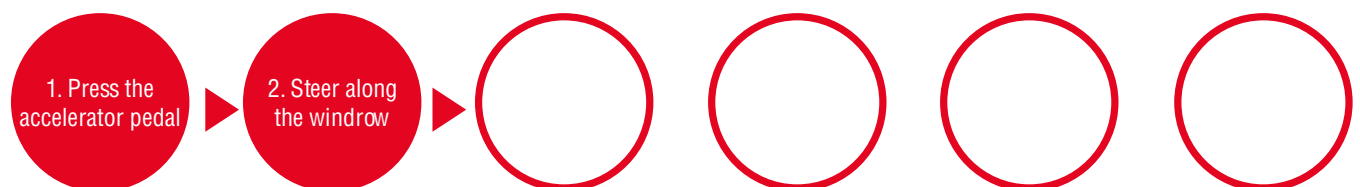

TIM 1.3 process sequence with driving speed set by the TIM server: **2 steps per bale**





Baling has never been easier and more comfortable.

### Enormous savings in work steps

If the operator is inexperienced or tired, bale quality and output suffer. With the help of TIM technology, the baler can perform a number of actions for the driver, meaning a significant increase in comfort. For every 100 bales, TIM can save up to 800 operations.

### TIM (Tractor Implement Management)

TIM is a cross-product and cross manufacturer ISOBUS solution for the agricultural machinery industry whereby the implement is able to control certain tractor functions.


Baling is one of the jobs that requires the greatest number of actions from the operator. A RV PLUS Series round baler specified with TIM option handles most of these tasks itself. As a result, it not only provides a significant gain in comfort and efficiency, but also ensures consistently high bale quality.

### Key advantages in baling

The TIM system really comes into its own in baling operations where the working windows are often narrow due to weather conditions. The work is completed more quickly and with a higher bale quality.

Contractors and large farms in particular benefit from the user-friendliness of the TIM technology, which can be quickly mastered by different operators. The cost aspect is another factor to bear in mind. Highly efficient use of a TIM equipped baler results in lower costs for parts that wear out, fuel, tyres and so on.

Because the baler opens the tailgate as soon as the bale is tied, this also increases efficiency, especially when the operator is tired. If the system detects a completed bale is ready to be released on a slope the driver is alerted and automatic bale release is paused. The operator can override the automatic process at any time during baling.

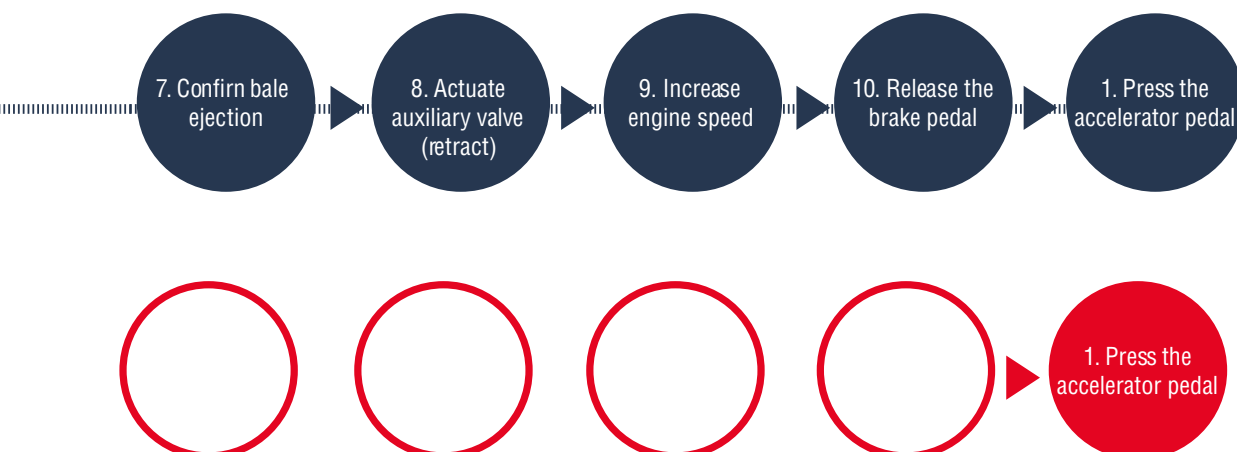



# RV 5100 – RV 5200 PLUS SERIES BALERS

*My way of Farming!*





**RV 5116 Plus** Bale size:  
0.8m up to 1.65m  
**RV 5118 Plus** Bale size:  
0.8m up to 1.75m

RV 5116 Plus and RV 5118 are designed for versatile performance in a wide range of crop conditions. Available with a choice of fork feeder or rotor intake systems.



**RV 5216 Plus** Bale size:  
0.8m up to 1.65m  
**RV 5220 Plus** Bale size:  
0.8m up to 2.00m

RV 5216 Plus and RV 5220 Plus producing bales of unrivalled quality in all crop conditions. Choice of high capacity intake systems including rotor and 14 or 25 knife SuperCut pre-chopping systems.





## Well-Shaped Dense Bales *with a Moderate Core*

### **Choice of maximum bale size RV 5116 Plus**

Bale size: 0.8m up to 1.65m

### **RV 5118 Plus**


Bale size: 0.8m up to 1.75m

### **Big Capacity with Superb Bale Quality**

RV 5116 Plus and RV 5118 Plus balers have superb intake capacity and produce great quality bales in a wide variety of crops. Bale diameter is easily adjusted from the control terminal, while a combination of five belts and three rollers provides instant bale starting in all conditions.

The RV 5100 bale chamber is equipped with a combination of three rollers and five wide laced belts. The mixed chamber concept ensures smooth bale rotation right from the start and reduced crop losses, even in really dry conditions.





The split drive gearbox on rotor intake models provides even power distribution reducing wear.




A combination of 5 belts and three rollers provides dense bales with a soft core and an easy bale start.

### Improved Bale Formation

The result is a very firm bale with a moderate core. Straw bales will be more tolerant to poor weather conditions, while silage bales will maintain their shape for improved stacking and easier handling.

### How the Baling Chamber Works

1. The small pre-chamber at the start of the bale formation ensures well-shaped and dense bales with a moderate core and tight outer layers.
2. Two aggressive front rollers come in contact with the crop and are designed to perform well in all conditions. They ensure instant and efficient bale start with every type of crop.
3. As the bale grows, the belts are subjected to steadily increasing resistance from two hydraulic cylinders, assisted by a heavy duty tension spring. As the bale diameter grows, so does the bale density.

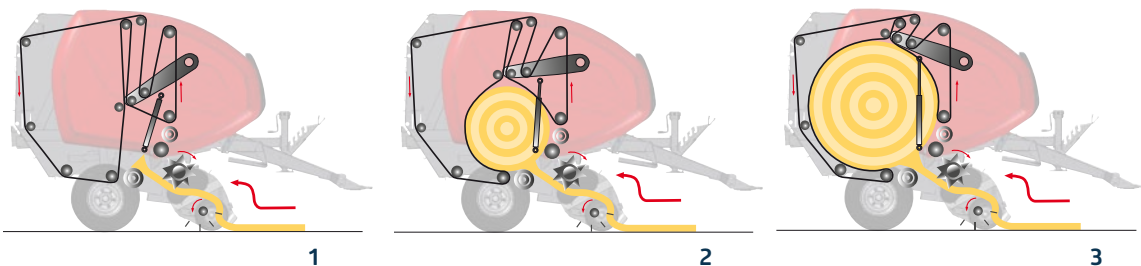



## Efficiency and Performance *are Unmatched*

### **Choice of maximum bale size** **RV 5216 Plus**

Bale size: 0.8m up to 1.65m

### **RV 5220 Plus**

Bale size: 0.8m up to 2.00m

### **RV 5216 – RV 5220**


The defining feature of RV 5216 and RV 5220 Plus series balers is their ability to produce bales of unrivalled quality in all crop conditions. Efficiency and performance are unmatched, while smart 'Intelligent density' allows bales to be tailored to perfectly match all requirements.

Designed for professional use in demanding conditions, the bale chamber of the Vicon RV 5216 and RV 5220 models is designed for multi-crop use, and is equally at home in silage, hay and straw.






Profiled rollers provide instant bale formation and are equipped with self-cleaning scrapers designed for working in wet silage conditions.



The RV 5216 and RV 5220 Plus are fitted with five durable endless belts without joiners offering smooth running and low maintenance.

### How the Baling Chamber Works

1. Specially profiled lower front rollers ensure instant bale starting in all crops and are constantly cleaned by a scraper specially designed to perform well in wet silage conditions.
2. As the bale diameter grows, the belts are subjected to steadily increasing resistance from two hydraulic cylinders and two spring tensioners.
3. A high density bale with a smaller core is produced. Straw bales are more tolerant to poor weather conditions and silage bales maintain their shape better for improved stacking and easier handling.

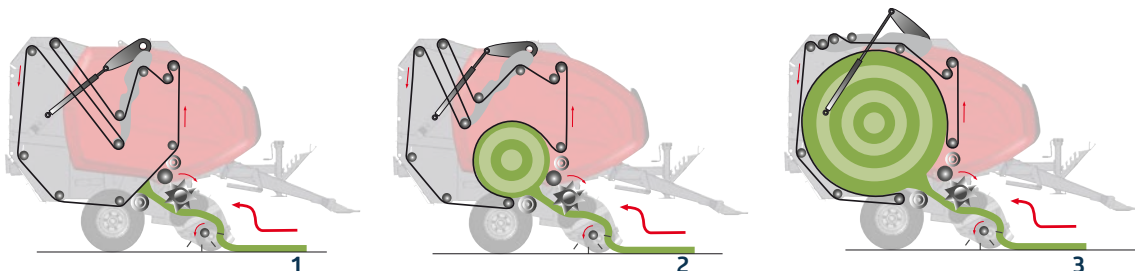



# RV 5200 PLUS FLEXIWRAP BALERS

*My way of Farming!*







The optimal solution for integrated baling and wrapping, ensuring fast and efficient one man operation. Maximum bale diameter up to 1.65m – maximum bale diameter for RV 5220 up to 2.00m (baling only) – and with a choice of 14 or 25 knife SuperCut pre-chopping intake systems.



**RV 5216 Plus FlexiWrap** Bale size: 0.8m up to 1.65m  
**RV 5220 Plus FlexiWrap** Bale size: 0.8m up to 2.00m





## Versatile One-Man Baling ***and Wrapping Combination***

*New Vicon RV 5000 Plus series FlexiWrap models combine high density baling, fast, accurate bale transfer and a high speed twin satellite wrapper. They are the ideal solution for one-man operation. Designed for working in demanding conditions, the unique bale transfer solution provides trouble free operation even on steep slopes.*





Bale turner option.  
During transport the kit is automatically pivoted into a safe position on the wrapping unit.



Twin cassettes for 10 spare film rolls operated hydraulically.



Twin satellite wrapper with 2 pre-stretchers and 4 endless belts for fast and stable wrapping.



Simple manual operation from new remote control panel.

### Strong and durable chassis design

New FlexiWrap Plus series models feature a revised wrap around chassis which has been optimised to minimise crop build-up. Durable tandem axles provide maximum stability on both road and field. Larger standard equipment 560/45R22.5 Vredestein flotation tyres provide a lighter footprint for reduced field compaction in wet conditions.



Quick and safe road transport.



## Integrated ***Baler Wrapper Combination***

***RV 5000 Plus series Flexiwrap models provide a truly versatile baling and wrapping solution. With the ability to handle everything from 1.25m diameter wet silage bales, right up to 2.0m diameter bales in dry straw crops, a Vicon Flexiwrap gives you the opportunity to take on every baling task.***




Full ISO-BUS  
compatibility  
as standard.

### **Handle everything from the comfort of the tractor seat**

Fully automatic control of baling and wrapping from the Tellus Pro terminal. Flexiwrap models are fully ISO-BUS compatible, enabling direct connection to any ISO-BUS tractor. On completion of bale formation, the wrapper triggers

the tailgate opening, bale transfer commences and the wrapping cycle starts. The complete machine functions fully automatically. Baler and wrapper status are continuously displayed on separate areas of the large Tellus Pro touch screen for maximum operator convenience.





**Fast and Accurate Bale Transfer**

Once the net is applied to the bale the wrapping table moves towards the tailgate, ready to receive the finished bale. When the tailgate opens the bale is dropped directly onto the table (no interfering steps from baler to wrapping table). This provides secure bale transfer with no risk of the bale rolling off the table, even when working in hilly conditions. Once the bale is on the wrapping table it is transferred quickly to the satellite wrapper and wrapping starts instantly.

**“High speed wrapping**  
– no risk of film damage”

**High Speed Wrapping**

The wrapping table with 4 endless belts rotates the bale evenly during wrapping with no risk of film damage. The twin pre-stretchers ensure high speed wrapping, so the wrapping process will finish before the new bale is ready. The pre-stretchers are positioned close to the bale, to limit the amount of air trapped under the film during wrapping.

The wrapped bale can be unloaded automatically or manually anytime during formation of the next bale. Manual drop allows the driver to drop the bale in the most convenient place, for example dropped in line for easy pick-up. The low mounted wrapping table gently unloads the bale. In addition the FlexiWrap can be fitted with a bale turner. The bale is tipped off gently on its end, where the highest number of film layers are applied.



Once the net is applied to the bale the wrapping table moves forward under the tailgate of the baler.



The bale is dropped directly onto the wrapping table.



As soon as the bale is transferred away from the baler, the tailgate automatically closes, and baling can resume.



The wrapping table moves rapidly to the pre-stretchers and wrapping starts instantly.



## Original Parts & Service

***We are here so you can focus on your crop***

- 
- ① Long lasting, high quality spare parts
  - ② Over 100 years of parts knowledge
  - ③ Support from a wide network of dealers
  - ④ 24/7 spare parts service
  - ⑤ Highly skilled dealer technicians





**“MYVICON**  
Connected farming, my way”

**A personalised online platform tailored to your machine needs**

With MYVICON you will benefit from easy access to Vicon's online service tools. Receive first hand access to information on future developments and updates, operator and spare part manuals, FAQs and local VIP offers. All information is gathered in one place.



**REGISTER YOUR PRODUCT NOW:  
MY.VICON.EU**

# Facts

Model	RV 5116 F Plus	RV 5116 FD Plus	RV 5116 R Plus	RV 5118 F Plus	RV 5118 FD Plus	RV 5118 R Plus	RV 5216 R Plus
Dimensions & Weight							
Length m	4.48	4.48	4.48	4.48	4.48	4.48	4.48
Width m	2.52	2.52	2.52	2.52	2.52	2.52	2.52
Height m	2.70	2.70	2.70	2.78	2.78	2.78	2.70
Weight appr. kg	2650	2700	2840	2700	2750	2890	2990
Bale Chamber							
Diameter min. (m)	0.80	0.80	0.80	0.80	0.80	0.80	0.60
Diameter max. (m)	1.65	1.65	1.65	1.75	1.75	1.75	1.65
Width (m)	1.20	1.20	1.20	1.20	1.20	1.20	1.20
Bale formation	5 belts+3 rollers						
Belt no/width (mm)	5/220	5/220	5/220	5/220	5/220	5/220	5/220
Belts - endless type	-	-	-	-	-	-	●
Greasable roller bearings (central)	●	●	●	●	●	●	●
Bale ramp	0	0	0	0	0	0	0
Pick-up							
Working width (cm)	200	220	220	200	220	220	220
Tine rows (nb)	4	5	5	4	5	5	5
Tine spacing (mm)	60	60	60	60	60	60	60
Crop deflector	●	●	-	●	●	-	-
Roller crop press	-	-	●	-	-	●	●
Pneumatic gauge wheels	●	●	●	●	●	●	●
Intake							
Fork Feeder	●	-	-	●	-	-	-
DuoFeed Fork Feeder	-	●	-	-	●	-	-
PowerFeed Rotor	-	-	●	-	-	●	●
SuperCut 14 knives	-	-	-	-	-	-	-
SuperCut 25 knives	-	-	-	-	-	-	-
Knife protection (on each knife)	-	-	-	-	-	-	-
Knife group selection	-	-	-	-	-	-	-
Drop floor	-	-	●	-	-	●	●
Driveline							
1½" Main drive chain	●	●	●	●	●	●	●
W-A PTO shaft	●	●	●	●	●	●	●
Shear bolt protection	●	●	-	●	●	-	-
Cam clutch protection	0	0	●	0	0	●	●
Binding (PowerBind)							
Net only variant	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls
Net & Twine variant				8 balls+3rolls			
Wrapping Unit							
Support rollers / belts (nb)	-	-	-	-	-	-	-
Film pre-stretcher	-	-	-	-	-	-	-
Film cut-and-hold	-	-	-	-	-	-	-
Film roll magazine	-	-	-	-	-	-	-
Bale-on-end kit	-	-	-	-	-	-	-
Operation							
Focus 3 terminal (non Isobus versions only)	●	●	●	●	●	●	●
Isobus compatibility option	0	0	0	0	0	0	0
IsoMatch Tellus Go+ (only with Isobus option)	0	0	0	0	0	0	0
IsoMatch Tellus Pro (only with Isobus option)	0	0	0	0	0	0	0
Hydraulic outlets	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA	1SA+1DA+R
Wheels and Axles							
11.5/80-15	●	●	-	●	●	-	-
15.0/55-17	0	0	●	0	0	●	●
19.0/45-17	-	-	0	-	-	0	0
500/50-17	-	-	0	-	-	0	0
550/45-22.5	-	-	0	-	-	0	0
560/45R22.5	-	-	-	-	-	-	-
710/35-R22.5	-	-	-	-	-	-	-
Hydraulic brakes	0	0	0	0	0	0	0
Air brakes	0	0	0	0	0	0	0
Others							
Reversible drawbar	●	●	●	●	●	●	●
PTO (rpm)	540	540	540	540	540	540	540
Min. power requirem. (kW/hp)	38/55	38/55	45/64	45/64	45/64	52/70	45/64
● Standard   0 Optional   - Not available							

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations.



RV 5216 Plus SC14	RV 5216 Plus SC25	RV 5220 R Plus	RV 5220 Plus SC14	RV 5220 Plus SC25	RV 5216 Plus SC14 FlexiWrap	RV 5216 Plus SC25 FlexiWrap	RV 5220 Plus SC14 FlexiWrap	RV 5220 Plus SC25 FlexiWrap
4.48	4.48	4.75	4.75	4.75	7.40	7.40	7.40	7.40
2.52	2.52	2.52	2.52	2.52	2.99	2.99	2.99	2.99
2.70	2.70	2.82	2.82	2.82	2.90	2.90	3.00	3.00
3250	3520	3340	3600	3920	6050	6320	6400	6720
0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60
1.65	1.65	2.00	2.00	2.00	1.65	1.65	2.00	2.00
1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20	1.20
5 belts+3 rollers								
5/220	5/220	5/220	5/220	5/220	5/220	5/220	5/220	5/220
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
0	0	0	0	0	-	-	-	-
220	220	220	220	220	220	220	220	220
5	5	5	5	5	5	5	5	5
60	60	60	60	60	60	60	60	60
-	-	-	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
-	-	-	-	-	-	-	-	-
-	-	●	-	-	-	-	-	-
●	-	-	●	-	●	-	●	-
-	●	-	-	●	-	●	-	●
●	●	-	●	●	●	●	●	●
-	●	-	-	●	-	●	-	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
-	-	-	-	-	-	-	-	-
●	●	●	●	●	●	●	●	●
3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls	3 rolls
8 balls+3rolls	-	8 balls+3rolls	8 balls+3rolls	-	-	-	-	-
-	-	-	-	-	2 / 4	2 / 4	2 / 4	2 / 4
-	-	-	-	-	2	2	2	2
-	-	-	-	-	2	2	2	2
-	-	-	-	-	10	10	10	10
-	-	-	-	-	0	0	0	0
●	●	●	●	●	-	-	-	-
0	0	0	0	0	●	●	●	●
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0
1SA+1DA+R	1DA+1DA+R	1SA+1DA+R	1SA+1DA+R	1DA+1DA+R	1SA+1DA+R	1DA+1DA+R	1SA+1DA+R	1DA+1DA+R
-	-	-	-	-	-	-	-	-
●	●	●	●	●	-	-	-	-
0	0	0	0	0	-	-	-	-
0	0	0	0	0	-	-	-	-
0	0	0	0	0	-	-	-	-
-	-	-	-	-	●	●	●	●
-	-	-	-	-	0	0	0	0
0	0	0	0	0	-	-	-	-
0	0	0	0	0	●	●	●	●
●	●	●	●	●	●	●	●	●
540	540	540	540	540	540	540	540	540
55/75	69/95	50/70	60/80	74/100	55/75	69/95	60/80	74/100

Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant. © Kverneland Group Ravenna S.r.l.










# Proud History of Ground Breaking Innovations

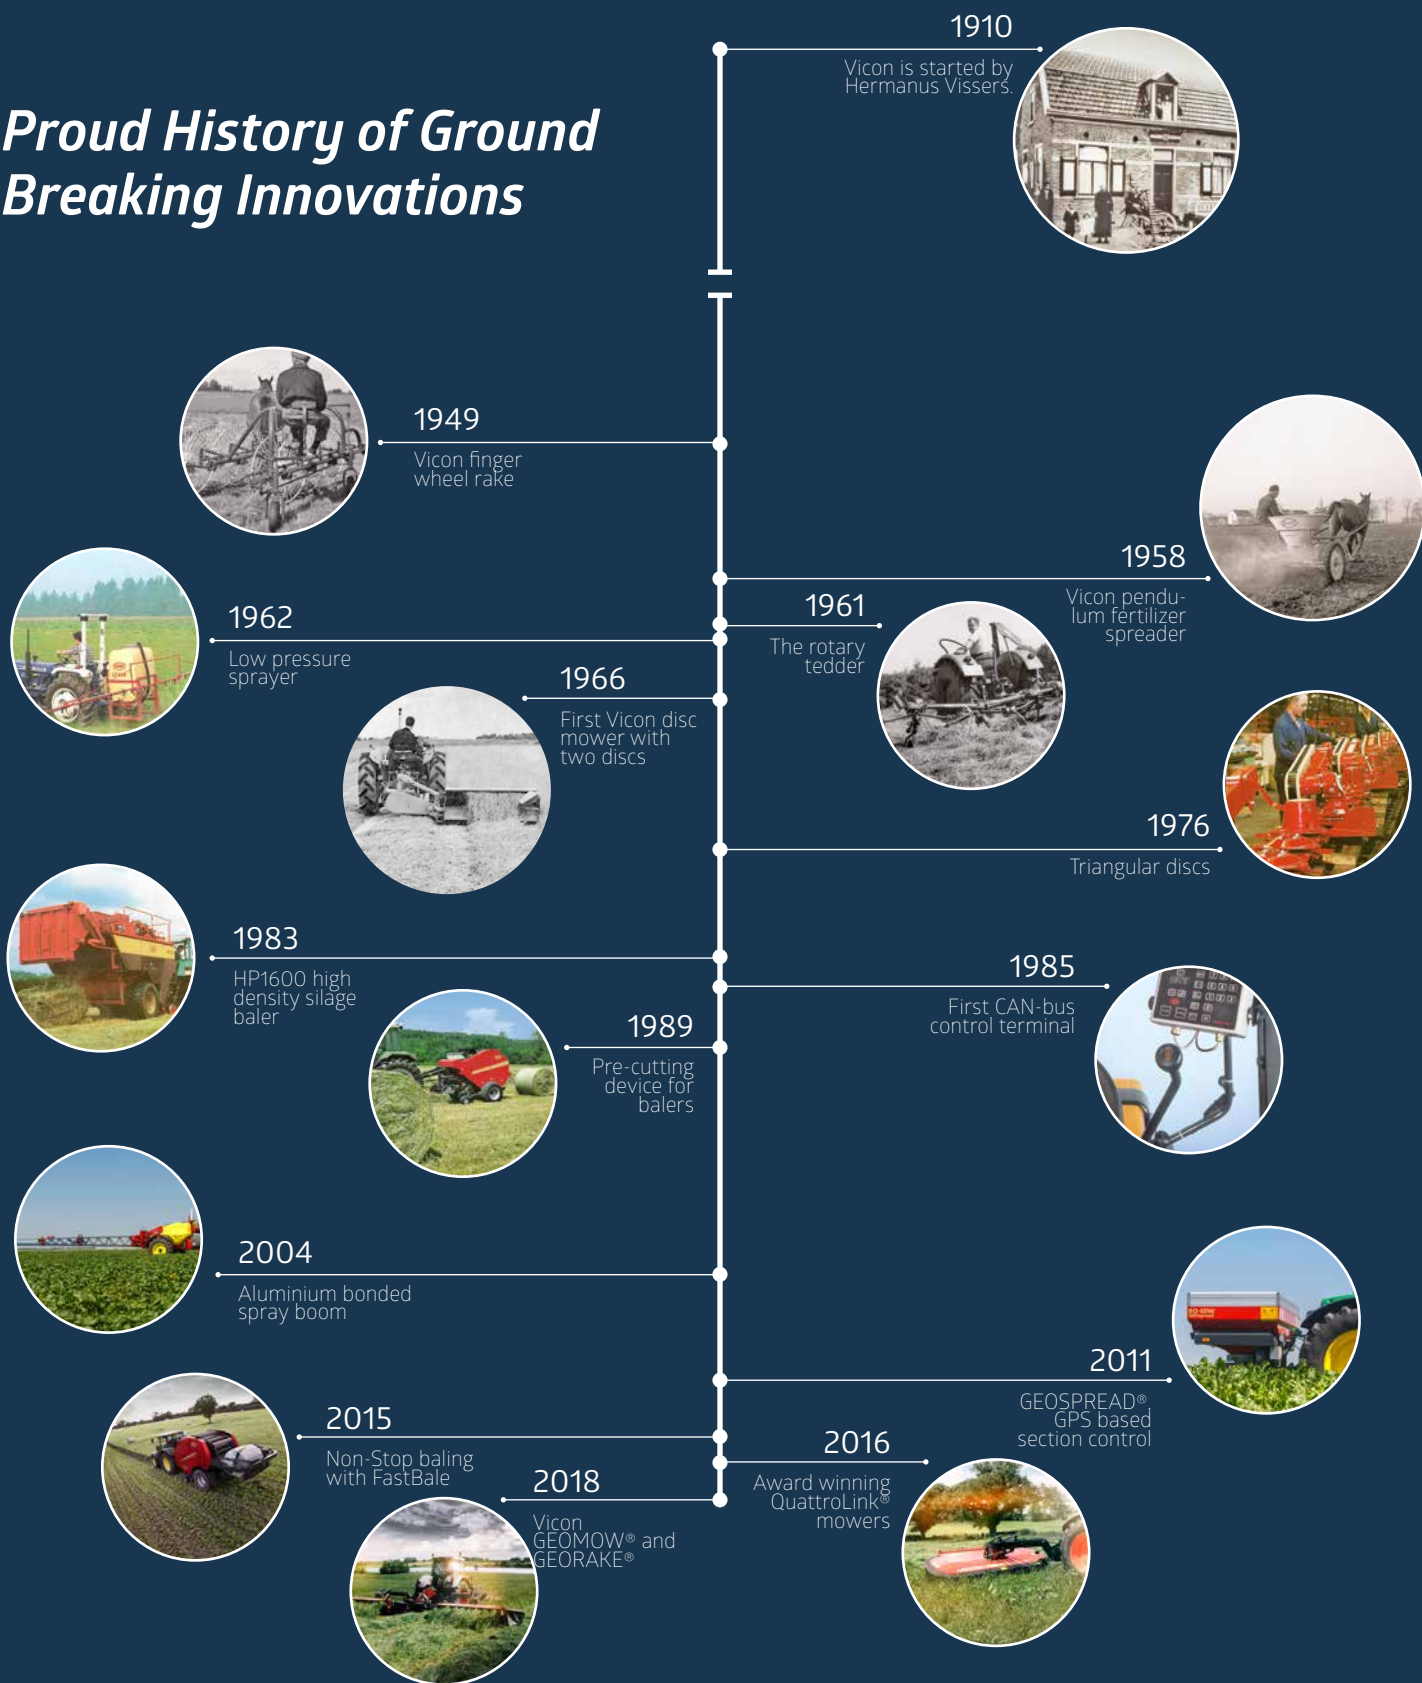

*My way of Farming!*



[www.vicon.eu](http://www.vicon.eu)

B-0102-EN\_08-2023