

EXTRA

324F Alpin-328F Alpin



Front Mounted Disc Mowers



My way of Farming!

Alpine Front Mowers *for Hilly Conditions*

Big Machine Performance in Compact Design


Tailor-made for use in mountain regions, the EXTRA 324F-328F Alpin offer an interesting package. With 2.4m and 2.8m working width and a weight of only 450kg-545kg, they require minimum horsepower.

See it All – Do it All

During the design phase of EXTRA 324F-328F Alpin special attention was directed towards maximum visibility during operation. These mowers have a low design for excellent visibility, even on both sides of the mower. The driver has an unhindered view ahead and around the complete mower.

Designed for Challenging Conditions

These mowers are truly designed for challenging field conditions, like mowing hilly fields and steep slopes. Gravity point is positioned as close as possible to the tractor, adding

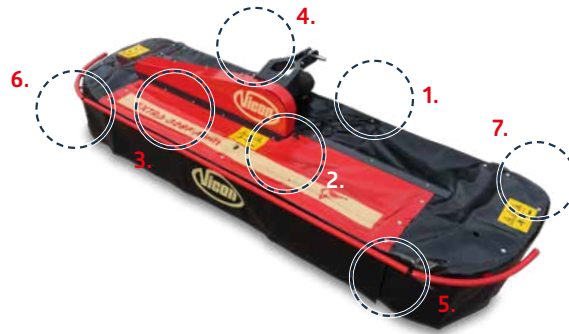

to stable and smooth running of the tractor, when going up and down steep slopes. The suspension concept allows a transverse adaptation of 28°, giving the mower outstanding flexibility.

Counter Rotating Discs for Excellent Crop Transfer

The 6 or 8 counter-rotating triangular discs, ensure a good crop flow and crop transport of the cut material across the cutterbar – an important feature, especially when mowing downwards, as the crop tends to build up in front of the cutterbar.

Right Fit for Most Mountain Tractors

The EXTRA 324F-328F Alpin are the ideal fit for both specialised mountain tractors and standard tractors. They are designed for both clockwise and anti-clockwise solutions and will be the right fit for most tractors saving operation at 540rpm.

Simple Handling and Operation

The EXTRA 324F-328F Alpin are designed for handy, easy operation. The outer guards fold hydraulically into transport position (optional), with no need to leave the tractor cab. A convenient feature when going from field to field.

“**Compact solution**
for mountain
regions”



1. Gravity point is close to tractor for stable, safe operation on steep slopes.



2. Switching between either 540 or 1000rpm is easy done by just swapping pulleys.



3. Choice of either clockwise or anti-clockwise driveline, fitting to any tractor supplier.



4. Pivoting point positioned in the middle of the mower for excellent ground tracking and even ground pressure across the complete width.



5. Outstanding visibility during operation, due to low design concept.



6. Six or eight counter-rotating discs, each with 3 knives ensure excellent cutting performance.



7. Transverse adaptation of 28° for mowing even the most demanding fields.

Facts

Model EXTRA	Front Mounted Plain Mower	
	324F Alpin	328F Alpin
Dimensions & Operation		
Working width m	2.40	2.80
Weight appr. kg	450	545
Number of triangular discs	6	8
PTO power req. min (kW/hp)	23/31	26/35

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant. © Kverneland Group Kerterminde AS



vicon.eu



My way of Farming!