

EXTRA

600-700-900



Trailed and Mounted Disc Mower Conditioners



My way of Farming!

LOOKING FOR SOMETHING EXTRA?

My way of Farming!





The iM Farming logo appears when the implement can be connected to our smart farming systems and accessories, essential for running your farm.



Working the land, running my farm and connecting with nature. Farming is my way of living, and despite being rough at times, I never grow weary of everyday tasks of attending to my land and livestock. I keep up with developments by staying loyal to personal philosophies and applying the appropriate strategy.

I shape and influence my own future by combining craftsmanship with modern technology, employing the very best machinery. I actively seek new opportunities, by being innovative in my way of working. I work hard to grow a good crop. I am passionate about my livestock, providing my animals with only the best. My farm and its returns, reflects who I am, because my heart and soul is put into the work I do.

Farming is about passion, about growing and developing, my crop, my farm, myself, my way.

Unmatched Cutting Performance *with Three-Bladed Discs*



“*Triangular discs*
– It’s our
Vicon DN Δ ”



Triangular Discs with 3 Blades

Experience better cutting performance. The Vicon cutterbar is fitted with 3 bladed discs. They provide 50% higher cutting frequency for more cuts.



Strong and Sturdy Cutterbar Design

The fully welded Vicon cutterbar with overlapping C-profiles makes for a rigid and strong design, ensuring high level of durability.



Always Counter-Rotating Discs

All Vicon cutterbars have an even number of counter-rotating discs, meaning discs always work in pairs. This provides generous overlap between all discs and a better crop transport.



Low noise Cutterbar

Low maintenance cutterbar with quiet operation thanks to the specially tooled gear wheels.



The Vicon cutterbar is engineered with durability and excellent cutting performance in mind. The fully welded cutterbar is designed for long and demanding workdays with maximum uptime. The Vicon triangular disc is renowned for providing excellent cutting performance, leaving a clean cut stubble.



Always Counter-Rotating Cutting Discs for Improved Overlap

Don't compromise on your cutting performance. All Vicon mowers have an even number of counter-rotating discs, meaning discs always work in pair and turn towards each other. This provides maximum overlap between all discs and a better cut. In addition it efficiently and immediately transports the crop to the rear.

Three-Bladed Discs for More Cuts

Striving for the best cutting performance has always been a vital part of the Vicon DNA. Vicon cutterbars are renowned for the triangular disc and its excellent cutting performance. They provide a 50% higher cutting frequency compared to conventional solutions.

With three blades per disc Vicon EXTRA Δ mowers are constantly cutting. This means a third less load per knife and an even load on the drive and smoother power usage in addition to producing a neat, clean cut stubble.



The Vicon Cutterbar

Made to Perform



Strong Fully Welded Cutterbar


The Vicon cutterbar provides increased uptime with its fully welded design. The fully welded cutterbar with overlapping C-profiles makes for a very rigid and strong design, ensuring very high level of durability. It is designed for years of hard work.

The Low Noise Cutterbar for Comfortable Work Days

The Vicon cutterbar is renowned for its low noise level during operation. This is thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission – convenient during a long and busy working day.

The long curved gear wheels run smoothly in oil and provide lots of power transmission with little slack. The risk of the gearwheels “catching” on the corners is minimised by the special Vicon design with “round” design, which in turn reduces wear and noise.

“**Fully welded**
cutterbar design”

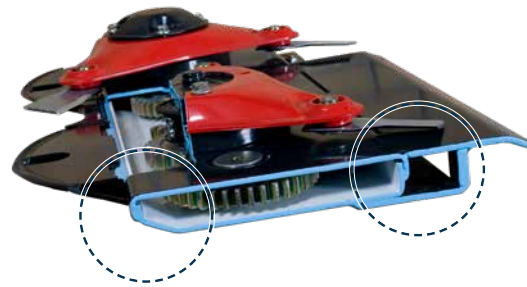


Fully welded Cutterbar

Fully welded cutterbar with overlapping C-profile for a strong and durable construction. High oil capacity ensures low working temperature.



Vicon Hubs

Next generation Vicon hubs provide more efficient transfer of power and reduced power consumption.

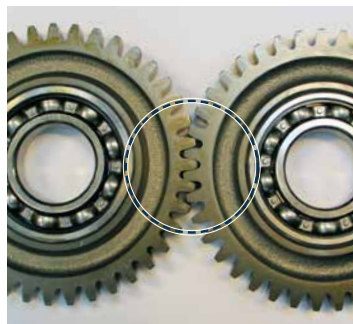

Low Noise Cutterbar

Low noise level thanks to specially tooled gear wheels with round design and long teeth for efficient power transmission.



'Express' – Easy and Quick Change of Knives


With Express quick change system replacing or turning knives is easily done. All disc mowers in the EXTRA range can be fitted with the 'Express' system.

Effective SemiSwing Conditioning *For Quality Feed*

What Makes SemiSwing Stand Out

Utilising centrifugal force is what makes the Vicon SemiSwing conditioner stand out to other conditioning systems. It offers an aggressive conditioning effect while still offering excellent tine protection and virtually no wear and tear.

SemiSwing tines, due to their restricted movement pattern, are designed to encapsulate part of the centrifugal force, and utilise it to keep the tine in position during rotation. The benefits are no movement during rotation and full conditioning effect.



Efficient crop transfer - crop is efficiently lifted away from the cutterbar and moved along the conditioner plate, ensuring aggressive conditioning effect.

The very large dimension of the conditioner plate supports effective conditioning and uniform crop movement towards the rear of the machine.

The steel tines will stay in a fixed position during normal work, allowing for an aggressive conditioning effect.

The tine's swing design allows large obstacles to pass through without interfering with the rest of the conditioning process.

The full width conditioner allows for efficient crop conditioning and reduced fuel consumption.



Excellent Tine Protection - No Downtime or Maintenance

When encountering obstacles, the SemiSwing steel tines are able to pivot backwards and let obstacles pass through. This allows large obstacles (103mm) to pass without breaking the tines. This simple system minimises down time and reduces the risk of broken tines in the crop.

22kg of force is required to pivot the SemiSwing tine backwards.

This means the tine will stay in a fixed position while conditioning crop. This design minimises the tines movement during rotation, allowing for virtually no wear and tear on the brackets while still providing a full conditioning effect.

Reduced wear and tear – no constant movement of conditioner tines – virtually no wear on brackets or tines.

“**No maintenance**
– effective
conditioning”

Once in working position, the tine is locked by the centrifugal force. This allows each tine to stay in its' full working position.

Get the Full Conditioning Effect with Minimum Blockages

Vicon's SemiSwing tine conditioner is an aggressive full width conditioning system. When the rotor starts rotating, the SemiSwing tines will instantly move into their working position and stay in a fixed position.

The angle and position of the SemiSwing tines ensure the best possible crop transport. The crop is moved away from the conditioner rotor and towards the conditioner plate. This results in a reduced number of blockages and full utilisation of the conditioner plate.

A Quick Change *Artist*



Dual Adjustment of Conditioner Hood

The dual adjustment of the conditioner hood allows adaptation to differing crop conditions, whether high or low, heavy or thin. The correct setting is simply chosen, by adjusting two handles, done in seconds.

Higher Level Operator Comfort

Performance and maximum comfort. This concept combines both to meet the exacting demands of any job in the field.

**“Covers all
crop conditions”**




“**Optimise**
your crop flow”

Heavy or Light Crop


The front end (1) is adjusted according to amount of crop. In heavy, tall crop the conditioner hood is opened, to avoid blockages and ensure smooth efficient flow. In short crop, a smaller opening is preferred.

Aggressive Conditioning or Fuel Saving

The rear end (2) allows adjustment related to power consumption and aggressiveness of conditioning. A large gap between conditioner and hood means less aggressive conditioning and minimized power consumption. A small gap is chosen when very aggressive conditioning is preferred.

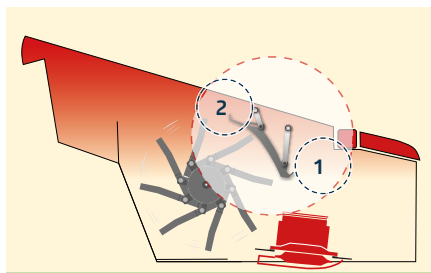

Front and rear end fully closed, for efficient conditioning in low crop conditions.

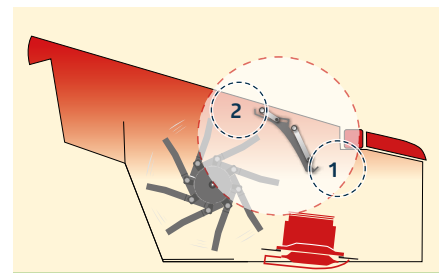

Front and rear end open, allowing unobstructed passage of massive amounts of crop.

Gentle Roller *Conditioning*




Preservation of Nutritional Value

Roller conditioning provides gentle, yet effective handling of fragile crop such as alfalfa or clover. Roller conditioning effectively cracks stems and their wax coating, while still preserving the nutritious leaves. This in turn facilitates an even drying pattern and full utilisation of the forage.

Chevron Rubber Rollers

The 225mm diameter wide rubber rollers, made from highly durable polyurethane, are vulcanised onto a steel core. This process guarantees straight rollers that will not twist out of shape, regardless of the force transmitted onto them. The chevron pattern actively directs the crop away from the cutting discs, which enables the best possible cutting quality, while limiting the power requirements needed.

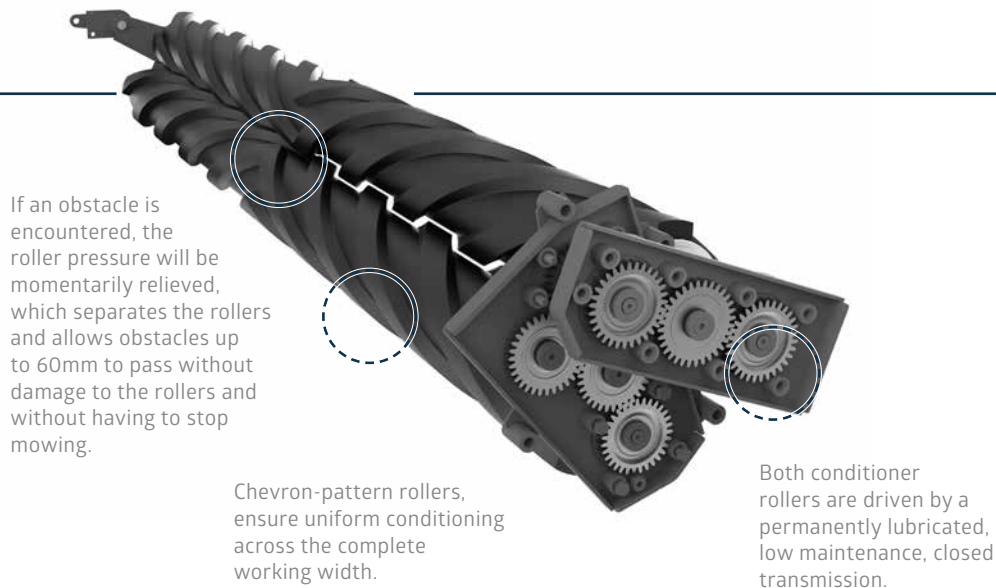

If an obstacle is encountered, the roller pressure will be momentarily relieved, which separates the rollers and allows obstacles up to 60mm to pass without damage to the rollers and without having to stop mowing.


Chevron-pattern rollers, ensure uniform conditioning across the complete working width.

Both conditioner rollers are driven by a permanently lubricated, low maintenance, closed transmission.

Full-Width Conditioning

The Vicon machines feature two full-width chevron, counter-rotating conditioning rollers, with the top roller located further forward than the bottom roller. This unique design ensures optimised flow of material from the cutting discs toward the rear, making complicated systems with extra guiding rollers, as seen in other systems, obsolete.

Additionally, the full-width design allows for the distribution of crop into a thinner mat, increasing the amount of crop in contact with the rollers.

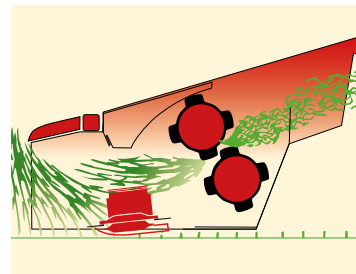

The special roller configuration, with the top roller located further forward than the bottom roller, provides outstanding upwards flow of crop. No need for an extra roller.

“**Dual Drive**
of Rollers”

EXTRA 700 SERIES - THE PROFESSIONAL MOWERS

My way of Farming!





Rear Mounted Mower Conditioners

3.18 and 3.50m working width



Front Mounted Mower Conditioners

3.18 and 3.50m working width



Triple Mower Conditioners

8.75 and 9.50m working width



Triple Mower Conditioners

10.20m working width



QuattroLink® Racecar Technology *Applied for Mower Conditioners*

Do the mowing job better, more accurate and faster with QuattroLink. Our groundbreaking suspension concept provides accurate tracking ability and highly flexible working range to deliver the best mowing performance.

1

More Accurate Ground Tracking

What makes the QuattroLink® concept unique? The four suspension arms provide the mowing unit with an exceptional flexibility in adapting instantly to demanding ground contours, inviting for higher speed and more productivity. The mowing pattern is highly flexible with a vertical working range of 700mm and a transverse working range of 30°.

2

Better Weight Distribution

The QuattroLink® concept is all about providing the best possible ground tracking. The mowing units are hydraulic suspended, with hydraulics integrated directly into the QuattroLink suspension. This provides the optimum weight distribution and protection of field and stubble. Ground pressure remains constant, even when following ground contours up and down.

**3**

Faster Mowing Job

Like a racecar you want better tracking to go faster and ability to instantly adjust to changing field conditions. Simply get from A to B in less time. The QuattroLink® suspension concept provides the mowing units with an exceptional flexibility in adaption to demanding field conditions, inviting for higher speed and more output.

4

Increased Peace of Mind

QuattroLink® suspension concept provides full flexibility in adaption to ground contours. It offers protection across the full working width of mower, including the part closest to the tractor. There are no limiting factors on the inside part of the mower, giving the driver true peace of mind when operating during a long demanding workday.



QuattroLink®

Exceptional Flexibility

Tailor-made to Lift Accuracy *and Mowing Performance*

The QuattroLink® suspension concept has set the standard for efficiency, performance and uptime. It is our high-end suspension concept for the most demanding terrains. With its pulled suspension concept and integrated hydraulics it provides the ultimate solution in accurate ground followings.



100% Non-Stop BreakAway

The QuattroLink® suspension provides full protection across the complete working width of the mower. Even on the inside part closest to the tractor. When encountering an obstacle in the field the mowing unit will swing backwards and over the obstacle, even on the inside of the mower, and then return it to the original working position. No need to stop – no time lost.



Integrated Hydraulic Suspension Concept

The mowing units are hydraulically suspended, with the hydraulics integrated directly into the QuattroLink® suspension, right above the mowing unit. This provides the optimum weight distribution and protection of field and stubble. Ground pressure remains constant, even when following ground contour up and down or if the overlap and working width is adjusted on the Vario versions.



Pulled Suspension Solution

The QuattroLink® suspension directly translate into exceptional ground following ability with its pulled solution. The four suspension arms provide an adaptation range of 400mm upwards and 300mm downwards for accurate tracking.



No compromises on Flexibility

QuattroLink® is made for the extreme conditions. With its highly flexible working ranges it efficiently adapts to uneven field conditions with a transverse working range of 30°.



Efficient Transport Solution *for Added Comfort and Uptime*



Ground pressure is easily set from the tractor seat, hydraulically with an easy to read pressure scale on the mower for clear guidance.



Minimum 500mm ground clearance across the complete mowing unit during headland turns.



**“Spend Your Time
Working in the Field
– Not on the Road”**

When parked, being in working position or during vertical storage, the lift arms are always in a horizontal position, making it very easy to mount or dismount the mower from the tractor.

Parking, Safe and Sure-Footed

With the integrated parking solution, storage of the EXTRA 700 series is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet.

Below 3.70m Transport Height

EXTRA 700 folds hydraulically for transport and will reach a transport height below 3.70m. The complete weight of the EXTRA 700 series is spread evenly on both rear tires, with a 50/50% weight balance. This means the tractor is not sliding to one side during transport, providing extremely stable running characteristics of tractor and mower during the transport, inviting for higher transport speed.



Position of the mowing unit can be adjusted infinitely within a 150mm span on the carrying arm, allowing cutting position of the rear mower conditioner to match working width of the front mounted mower conditioner or rear wheels of the tractor.





Hydraulic Adjustment of Overlap – *Maximise Your Mowing Capacity*

Unlock the Full Potential of Your Mower

Ensuring the correct overlap between front and rear mower is essential to maximise your mowing job. Too little overlap immediately causes problems when field conditions change. Too generous overlap limits you from utilising the capacity of the mower combination to the maximum, eventually leading to reduced productivity.

Vario Means More Productivity

EXTRA 736T Vario is fitted with hydraulic SideShift integrated into the carrying arm allowing each mowing unit to move 400mm. To easily compensate for changing field conditions, the adjustable overlap is designed as a telescopic arm, directly into the suspension.

Adjust on the GO

Adjusting the overlap is quickly done hydraulically from the tractor cab, and the chosen overlap is easily registered from the scale on the suspension arm. Increase overlap when mowing odd sized fields, going around corners or operating on slopes to ensure no stripes are left behind. Reduced overlap on flat and even fields to improve performance and cutting width as much as up to 10%.



Full overlap.



Working width utilised to the maximum.



Comfort Control

The optional ComfortControl joystick of the EXTRA 700T/R series provides the extra comfort of electro hydraulic folding for transport. Easy and simple.



EXTRA 736T Vario in transport. The telescopic frame arm moves to the lowest possible position to reach a transport height of only 3.70m

Ground Pressure Remains Constant

During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours. The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same.

No need to stop and adjust, reset and control the ground pressure before you can go on. Just set the mower to the requested overlap and mow on.



Easy Change-over for Widespreading

Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side and the FlipOver widespreading vanes are turned 180°. No tools are required.



Designed *to Get Things Done*

High Performance Mowing

The EXTRA 787 and EXTRA 795 triple mowers are designed to make easy work out of the hardest job. These triple mowers offer the ideal combination of capacity and simple operation.

The EXTRA 787 and EXTRA 795 excel in efficient mowing performance with the QuattroLink racecar suspension concept that provides the mowing units with exceptional flexibility in adapting to demanding crop conditions. With an intuitive design these mowers are easily adjusted and set for operation with simple control functions. This is a triple mower that gets the job done.



EXTRA 787 and EXTRA 795 fold into a safe transport position, above 90° for stable weight distribution and importantly to keep the mowing units away from tree tops during transport. The outer guards fold hydraulically into transport position (optional), with no need to leave the tractor cab.



With the integrated parking device, storage of EXTRA 787 and EXTRA 795 is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total height below 4.00m.



Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



The position of the mowing units can be adjusted infinitely within a 150mm span on the carrying arm to match the working width of the front mounted mower conditioner.



All hydraulic functions are controlled via the tractor valves in combination with a pre-selection PilotBox.



EXTRA 787 and EXTRA 795 are easy to handle and standard operated with a pre-selection PilotBox for (individual) lifting/lowering of mowing units and belts and setting of ground pressure.



Versatile Mower Combination *for More Uptime*

The Versatile Mower Solutions

The EXTRA 787T BX and EXTRA 795T BX are our multi-talented mower solutions with their productive BX swath belts. They come with largely dimensioned swath belts designed for heavy crop volumes and demanding conditions, including heavy first cut silage. The swath belts offer significant possibilities to improve productivity and quality of output. Featuring high-speed belts up to 1500rpm, they can carry high crop volumes and place them into even, narrow swaths.

Drop Excess Weight

Flexibility is paramount to improve work efficiency. EXTRA 787T BX and EXTRA 795T BX have the smart option to quickly dismount the two BX belts and park them safely on specially designed transport rollers. Dismounting the BX belts can be done in less than 15 minutes. In this way, you can easily leave unnecessary weight back home when crop merging is not needed.


“Significant possibilities
- to improve
productivity and
quality”



The swath belts can be easily disconnected and removed at the moment you don't need them, saving weight and fuel.



Optional transport rollers are available to safely park the BX belt when removed for storage.

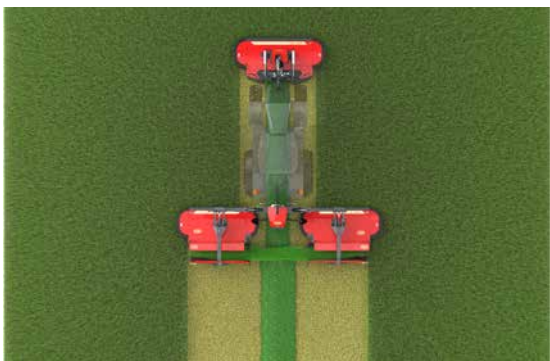

One large swath from up to 9.50m working width.



Using one belt to move crop away from field boundaries.



The wide belts allow handling of heavy crop flow.

Customize the Output as You Like


Versatility is further enhanced by the three-in-one solution offered by EXTRA 787T BX and EXTRA 795T BX, allowing one large swath, three single swaths or full width wide spreading. The standard fitted swath plates are easily slid into position for the desired swath width.

If conditions require wide spreading the mower is fitted with spreading vanes that are activated within minutes. No tools are required. The optional FlipOver widespreading solution provides 100% widespreading across the full working width.

“*The wide belts allow handling of heavy crop flow*”



Swath plates automatically expand when being slid inwards to support efficient and accurate swathing.

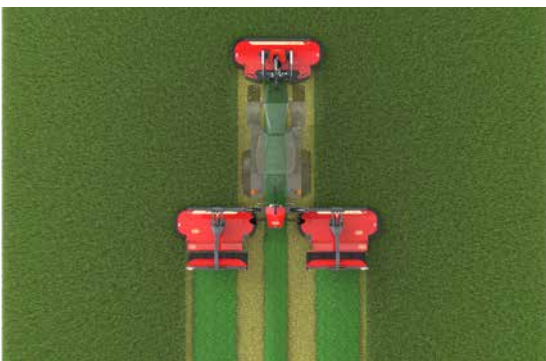

Wide spreading with the standard spreading vanes.



Three single swaths, easy set with the integrated swath plates.



Our most Productive ***Triple Mower Combination***

Maximise your mowing capacity with the EXTRA 7110 series with the QuattroLink racecar suspension concept. The EXTRA 7110 is our most powerful triple mower with 10.2m working width, heavy duty design and strong focus on total cost of ownership.

The Evolution Continues

Packed with innovative features such as full ISOBUS control, CurvePilot curve control, hydraulic overlap adjustment and full width BreakAway protection the EXTRA 7110 is custom-made for long productive working days. But it is the QuattroLink suspension concept and its unique ground following ability that makes this mower combination stand out.

Efficient Headland Management

EXTRA 7110 is a mower for working with large crop volumes and huge swaths. It provides generous clearance across the complete cutterbar, including the inside area. When lifting the mower on headlands, the mowing unit is raised and the carrying arm is tilted to a 10° angle. This provides the EXTRA 7110 series with a level ground clearance of minimum 500mm across the full working width.

When lowering the mowing unit the carrying arm is lowered evenly without one side touching the ground before the rest of the mower, avoiding unnecessary stress and wear on mower or field stubble.

“**Weather and field conditions are flexible**

– so your mower conditioner better be the same”



Minimum 500mm ground clearance across the complete mowing unit during headland turns. Mowing unit is raised and carrying arm tilted to a 10° angle.



The carrying arm is tilted back to bring the mowing unit into an even position before lowering the mowing unit.



Mowing unit is lowered evenly onto the ground without one side touching the ground before the rest of the mower.



CurvePilot Tackles Curves ***Without leaving Uncut Crop***

CurvePilot takes the advantages of hydraulic overlap adjustment to the next level. It is designed to help you maximise capacity during the mowing job and avoid leaving uncut crop. CurvePilot is an automatic system that constantly adjusts overlap between front and rear mowing units so you can utilise the working width and capacity to the maximum.




CurvePilot
Active



Vario Means More Productivity

The Vario hydraulic SideShift is integrated into the carrying arm allowing each mowing unit to move 400mm. To easily compensate for changing field conditions, the adjustable overlap is designed as a telescopic arm, directly into the suspension. During mowing operation the carrying arm always remains even to the ground, giving the mowing unit the freedom to instantly compensate and float across uneven ground contours. The true benefit of the suspension concept is that even though overlap is changed, the chosen ground pressure remains the same.

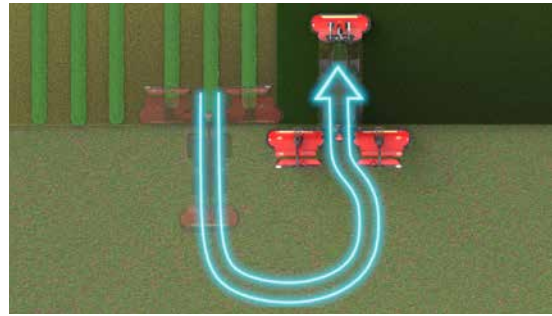

Avoid Mistakes during Headland Turnings

When mowing A-B lines with a GPS steered solution the tractor can make sudden counter steers when starting again on headlands if you are not hitting the exact starting point of the GPS tracks. When this occurs, CurvePilot immediately increases overlap to compensate and avoid striping during headland start.



Full Capacity on Headlands

When mowing the headland you typically position the mowing units with full overlap, reducing working capacity, to avoid leaving uncut crop in the field. With CurvePilot as standard you can mow at full working width and utilise the maximum capacity of the mower. CurvePilot will automatically choose the correct minimum overlap.



Comfortable Passing Obstacles

When mowing up and down the field you will typically mow with the mowing units at the maximum working capacity, leaving very little overlap between the front and rear mowing units. When driving around obstacles in the field, CurvePilot will automatically adjust the overlap and immediately compensates when you make turns in the field.



This is where *Efficiency Starts*

Compact During Transport

EXTRA 7110 folds hydraulically for transport and the telescopic frame arm moves to lowest overlap position, to reach a transport height of only 3.90m and a width below 3.00m. And there is no need to leave the tractor before heading off, the outer FlexProtect protection guard hydraulically folds into transport position (option).



Hydraulic foldable guards for fast conversion for transport is available as option.



The mower folds into an above 90° transport position, keeping the mowing units away from treetops.

Parking, Safe and Sure-Footed

With the integrated parking device, storage of the EXTRA 7110 series is made easy and convenient, requiring a minimum of space during winter storage.



The mower is firmly parked on strong and stable parking feet, bringing total height below 4.00m.



Integrated swath plates, easily adjusted to correct swath width.



Changing from swathing to widespreading is virtually a one minute job. The swath plates are easily slid to the side and the FlipOver widespreading vanes are turned 180°. No tools are required.



The Mower *Made for Heavy Work*

Shape the Swath As You Want

Vicon BX is designed to handle more tasks than ever before. Working in heavy first cut crop, combined with a narrow pick-up width of the following machine, may cause challenges in getting the swath narrow enough.

Vicon BX offers the possibility of positioning the swath belt in different operating heights, to deliver the crop on top of the swath made by the front mower, to make a narrow and box shaped swath. Delivery height is set by lowering or raising the belt

hydraulically on-the-go. This allows the full-width 3m BX belts to deliver swaths that are directly suited for loader wagons.

With the dual adjustable conditioner plate, efficient crop flow towards the swath belt is easily set. EXTRA 7110 provides a unique opportunity to adjust the conditioner plate at both front and rear ends, to optimize crop flow towards the belts for efficient swath formation, without leaving any material behind.



An integrated belt boost function automatically kicks in, to empty belts before raised.



AutoStop function of the BX belt is activated when raised on headland to reduce fuel consumption.

Automatic Adjustment of Belt Speed

Vicon BX automatically does the job of adjusting belt speed to working width, for the same uniform swath width, regardless of position of mowing units. If the mowing units are sideshifted to adjust overlap, the speed of the belts immediately adjusts, to compensate for the change in throwing distance needed. When increasing the overlap for mowing around corners, belt speed is lowered to ensure that crop is placed as intended.

Master Headlands

When the mowing units are activated for headland lift, an integrated belt boost automatically speeds up, to empty the belts before they are raised, leaving a clean and tidy headland. Furthermore the AutoStop is activated once belts are raised, automatically stopping them until mowing units are lowered again, keeping fuel consumption low.




Vicon BX can deliver the crop at different working height.



When using one belt only, speed is reduced to avoid crop being placed too far across the middle.



Quick Release of Swath Belts – *Drop 600kg in less than 10 minutes*

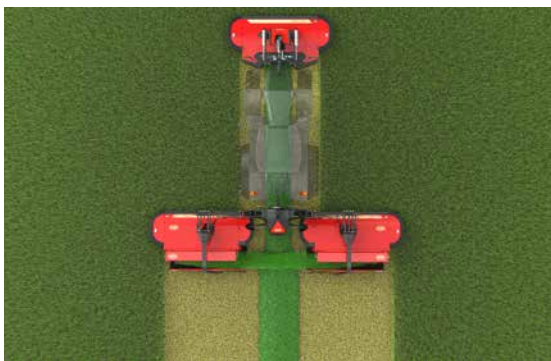

One large swath from 10.20m working width.



Using one belt to move crop away from field boundaries.



1 Slide the purpose-built transport rollers onto the BX-belt and remove the connection pin.



2 Disconnect the power cable and all hydraulic connections to BX belt with one single lever.



3 Lower the mowing units and the BX belt automatically comes off.

“**Go all in on Versatility**
with the BX swath
belt solution”

Drop Excess Weight


During working days, where crop merging is not required, the BX belts are normally raised into an inactive position, turning into unnecessary extra weight on the mower. The weight of the Vicon BX belts are in total 600kgs – heavy to carry – adding unnecessary cost to the fuel bill.

Swath Belt Quick Coupler


With the new optional Vicon quick-coupler solution, it is now possible to dismount the two BX belts in less than 10 minutes and park them safely on specially designed transport rollers. When disconnected, the BX belts automatically disappears from the terminal screen.

Optimise From Day To Day

This gives you the option of deciding from day to day, when work schedule is ready, if belts are needed or not. All it takes are three simple steps – no tools required!

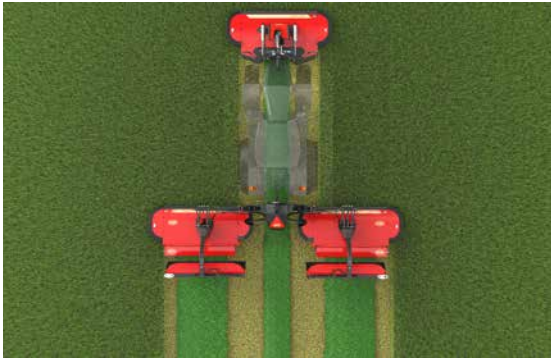

100% wide spreading with optional spreading vanes.

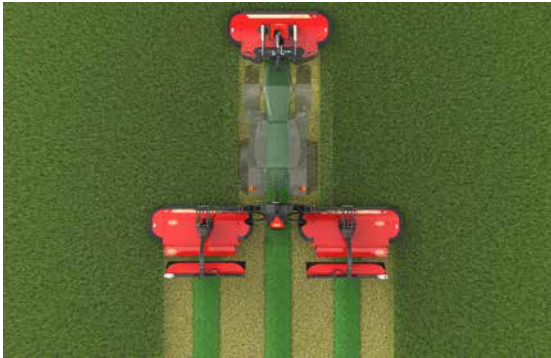

Three single swaths, easy set with the integrated swath plates.



Work Easy ***Be in Control***

Portus Terminal – Easy Operation during Long Work Days

The Portus terminal provides handy and ergonomically friendly control that simplifies machine operation. With integrated joystick the Portus comes in a compact size, making it easy to place right next to the operator, so it is ergonomically well positioned for long days of operation. A small screen integrated into the joystick always keeps the tractor driver informed about the chosen operation.

IsoMatch Grip Joystick

The EXTRA 7110 series can be controlled directly by the ISOBUS-tractor via its tractor-terminal. And if it's equipped with an ISOBUS-joystick this is possible too. If not available from the tractor, KvG offers an ISOBUS joystick to make the mowing job more comfortable.



IsoMatch Tellus GO+*
– Compact ISOBUS Terminal

IsoMatch Tellus GO+ is a full ISOBUS terminal. The compact design makes it easy to integrate in the tractor cab. Tellus GO+ is equipped with a 7-inch full colour touch screen with hard keys combined with a rotary switch for direct access to main functions.



“**Ergonomically friendly controls** that simplifies machine operation”

IsoMatch Tellus Pro Terminal

The IsoMatch Tellus Pro is a virtual terminal combining two Interface screens in one terminal. The 12" touch screen offers ergonomic use and is designed for clear viewing during long days of operation.



Portus Terminal

Main functions, such as headland lift, adjustment of overlap and setting of ground pressure are easily operated by simply moving the joystick up and down. Portus can be used as separate terminal for non-ISOBUS tractors or in combination with the tractors ISOBUS terminal for easy and convenient operation.



IsoMatch Grip Joystick

The IsoMatch Grip is a fully ISOBUS-joystick that can be programmed to your exact personal preference. Every individual function of the mower (lifting of individual units, ground pressure, belt control etc.), can be assigned to a button on your IsoMatch Grip, so you are always in full control.



Competent Details *that Matter*

Easy Inspection

To make routine maintenance and daily inspection check quick and efficient, the design of the front hood has improved, allowing complete access to the cutterbar. When lifted up, the front plate stays in position by a hydraulic cylinder. With an inbuilt magnet, the front tarpaulin will stay on top of the front hood, when folded up.

Built-In Swath Plates

Changing from spreading to swathing or adjusting the swath width to crop conditions is done in seconds. The swath plates automatically expand when being slid inwards to support efficient and accurate swathing, and there is no need to dismount them to achieve full width spreading.



Excellent down and upwards ground following ability of 250mm and 420mm respectively.

Exceptional Adaptation

The suspension design allows a transverse adaptation of 24° along with a total vertical working range of 670mm. If an obstacle is encountered, the ProLink will automatically lift the mower up and back, for maximum protection of cutterbar and machine.



Hydraulic folding of FlexProtect guards (optional).



One-touch parking handle, to lock and prepare the machine for dismounting.



Parking foot is easily activated and keeps the mower in level position when parked.



Freedom *to Customise*

Higher Level Operator Comfort

The new range of front mounted mower conditioners from Vicon brings new options to its line of 700 series mower conditioners. The 700 FT/FR series features a host of new improvements to bring operator comfort to a higher level.

The complete mower is designed for easy servicing and the low maintenance PTO shaft only required one seasonal greasing.

Both EXTRA 732FT and 736FT feature dual adjustment of conditioner plate.



Front cover is opened into a vertical position for easy access.

“*Optimum blend*
of precision and
ease-of-use”



Integrated swath plates,
easily adjusted to correct
swath width.

Dual Adjustment of Conditioner Hood

The new conditioner hood can be adjusted at both front and rear end to customize the conditioner to crop intensity. The build-in swath plates are easily set for swathing or spreading with no need to dismount for wide spreading.



Dual adjustment of conditioner plate to customize to crop intensity.



Stubble height adjustment is conveniently integrated directly into the suspension linkage. There is no need to tilt the A-frame of the tractor.



Generous ground clearance for headland turns of 420mm to pass large swaths without damaging them.

EXTRA Δ 600 SERIES - SMART DESIGN, EASY TO OPERATE



My way of Farming!



Rear Mounted Mower Conditioners
2.42, 2.84 and 3.18m working width



Front Mounted Mower Conditioners
2.84, 3.18 and 3.50m working width



Triple Mower Conditioners
8.75m working width





Efficient Suspension Concept *Keeps Track of Demanding Field Conditions*

Protection of the Cutterbar

Vicon EXTRA 600 series is fitted with the Vicon NonStop BreakAway system to protect the cutterbar. The integrated BreakAway autoreset system will protect the cutterbar from foreign obstacles.

If an obstacle is hit in the field the mowing unit will swing backwards and up. This gives maximum protection of the cutterbar.

Effortless Protection

There is no need to stop - or even to reverse the tractor to get the mowing unit into working position again. When engaged the spring loaded design ensures that the Vicon NonStop BreakAway system automatically returns the cutting unit to its' original working position.

Accurate and Simple Suspension

The EXTRA 600 series is fitted with a highly efficient suspension system that includes centre suspended mowing units, efficient spring suspension and NonStop BreakAway.

Excellent Ground Adaptation

The mowing units are centre suspended via a suspension spring, to give an even weight distribution across the complete mower width. The benefit is less skid wear, optimum protection of the stubble and less fuel consumption.



Equipped with optional hydraulic setting of ground pressure.

Two Mounting Options

EXTRA 600 series can be adjusted for optimal operation according to different circumstances, such as field contours or working width of the front mounted mower. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.

Work Smarter on the Go

For greater operator comfort, the ground pressure of the spring can be set hydraulically from the tractor cab. Easy to adjust, even on the go.

With this hydraulic version the tension on the large suspension spring, which controls the ground pressure, is adjusted hydraulically, to increase or lower pressure. The chosen ground pressure level is conveniently registered from the easy-to-read scale.

Accurate setting of ground pressure adds to significantly better working result and reduction of fuel consumption, as a mower with correct ground pressure is easier to pull, requiring less power and fuel.



Two mounting options.



Ample clearing during headland turns.



Centre suspension for even weight distribution across the entire working width.



The large compensating spring ensures excellent flotation across the full mower width.

“Hydraulic Adjustment of Ground Pressure”



Clever Machines *with Professional Characteristics*

Compact in Size – Massive in Features

Vicon offers 4 centre mounted mower conditioners, EXTRA 624T, 628T, 628R and 632T Farmer, in working widths of 2.42, 2.84 and 3.18m. These mowers offer two conditioner rotor speeds, 600 and 900rpm, which can be easily changed by simply switching pulleys, to adapt to different conditioning requirements. At low conditioner speed, fuel consumption is minimised.

Different Conditioning Systems

These machines are available with 3 different conditioning systems, roller, nylon and SemiSwing. The roller version offers gentle, yet effective roller conditioning of fragile crop.

The nylon tines are very rigid, yet durable, and will flex without breaking if meeting an obstacle. This means excellent protection from stones and other obstacles. SemiSwing offers a very aggressive conditioning effect while still offering excellent tine protection and virtually no wear and tear.

Clever Transport Solution

The low gravity point during transport, with the weight of the mower close to the tractor, provides an excellent weight distribution, even during high speed road transport, and the machine is fixed by the hydraulic lifting arm. In addition transport height is limited, so passing through narrow gateways or under bridges is not a problem. Another benefit is that the hydraulic cylinder also supports quick lifting of the mower from working to headland position.



EXTRA 624T, 628T/R and 632T Farmer are folded into vertical transport position using a hydraulic cylinder.

“**Efficient and Easy to Operate Mower Conditioners**”



540/1000rpm turnable gearbox as standard.

Choose Between Two Gearbox Speeds

The machines also offer a large degree of operating adaptability, as they are factory fitted with the option of being operated with either 540 or 1000rpm. It requires no additional accessory. All that is needed is to turn the main gearbox on the suspension 180°.



Optional parking stand for easy, compact storage.



Quick change from swathing to widespreading.



The spreading vanes are available as standard.



Optimise on Capacity *and Speed*

Easy to Operate for More Uptime

The EXTRA 687T has been designed with ease of operation in mind. In fact it is an uncomplicated butterfly combination purpose built to lower operating costs in terms of power and fuel consumptions, with power requirements starting at only 150hp. Equipped with 2 x 3.18m mowing unit, both fitted with 8 triangular discs and nylon tines the EXTRA 687T is geared for productive work days.

The Features that Matter

The EXTRA 687T is packed with features that matter, giving it the professional characteristics needed when adjusting the machine for changing conditions. Widespreading is standard fitted and conditioner speed can be set at either 600 or 900rpm by simply switching pulleys. To ensure optimal overlap between front and rear units, the mowing units can be mounted in two positions on the suspension arm.



Vertical Transport Position


For transport the mower folds into a compact position well behind the tractor. The folding design ensures that the weight is distributed evenly, with the weight of the mower close to the tractor. Transport height is well below 4.00m.



Available with either SemiSwing steel tine or nylon tine conditioner.

Parking, Safe and Sure-Footed

With the integrated parking device, storage of the EXTRA 687T is made easy and convenient, requiring a minimum of space during winter storage. The mower is firmly parked on strong and stable parking feet, bringing total storage height below 4.00m.

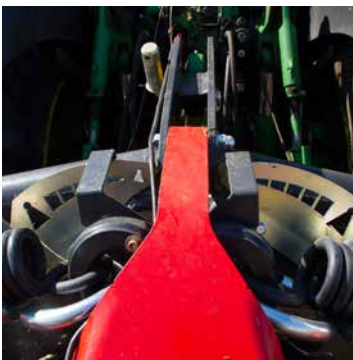

Large suspension springs, optionally with hydraulic setting of ground pressure.



Ample clearance during headland turns.



Each mowing unit can be lifted individually, convenient when mowing awkward shaped fields.



EXTRΔordinary *Operability*

Machines For Professionals

The Vicon EXTRA 628FT-632FT/FR and 635FT feature an improved design of the pulled floating suspension and very accurate ground following.

The gravity point is close to the tractor and with the very compact design, excellent view of the entire mowing area is guaranteed.




“**Floating Suspension with Three-Dimensional Adaptation**”

Superior Suspension Protecting Ground and Machine

Due to the suspension design of the EXTRA front mounted models, an even better flotation and more even ground pressure is possible. The two large suspension springs have been moved outwards to provide better side stability, which is reflected in optimum protection of the stubble and far less skid wear.

In addition the innovative suspension design allows a transverse adaption of 24°. This ensures excellent adaption to uneven ground contours and higher reachable speed when mowing.

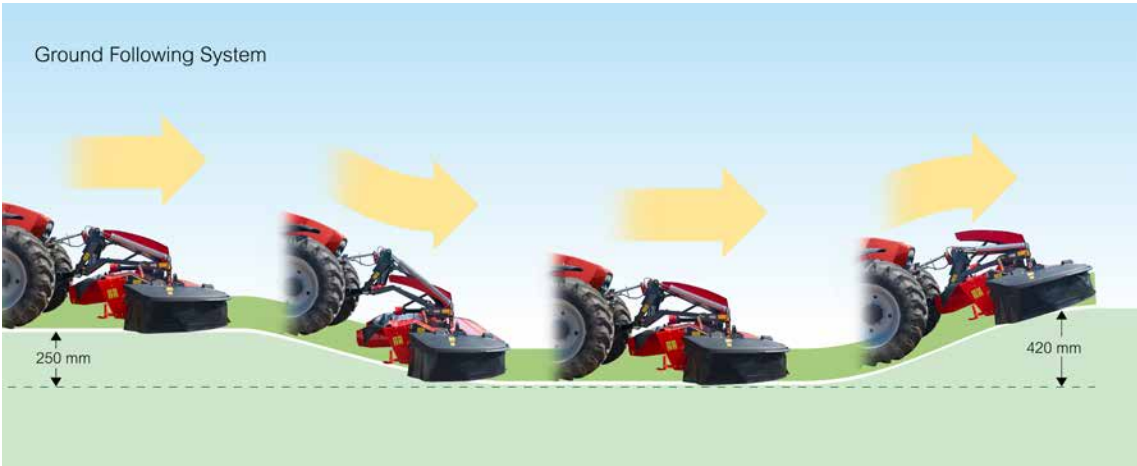

The moving pattern of these machines is extremely flexible, allowing downwards movements of 250mm and upwards of 420mm.



Achieve More *with a Front Mower Conditioner*

The Combination Mower

Vicon EXTRA 600FT/FR series front mounted models can be used in combination with a variety of mower conditioners, including trailed, rear mounted or triple mowers, or on its own, making this an extremely versatile machine. With a working width ranging from 2.80-3.50m, the capacity of the machines is substantial.

**“Clever design
for excellent
line of sight”**



Compact design for excellent view during operation.

NonStop BreakAway

To ensure maximum protection of the cutterbar, the Vicon NonStop BreakAway solution is implemented. During normal operation, the cutterbar is angled downwards, but if the NonStop BreakAway is activated, the cutterbar angle changes to a horizontal position, due to the geometry of the machine. This prevents the machine from damaging the ground surface.



Generous headland clearance of 350mm.



EXTRA 632FR – perfect for gentle, yet effective conditioning of fragile crop.

Easy Operation

Substantial efforts have been made to make daily operation as easy as possible. The clever design of the suspension creates an undisturbed view of the entire mowing area and an excellent overview during transport. A clearance of 350mm is achieved during transport and headland turns.



Tailored *To Any Request*

Trailed Mower Conditioners

Including features such as SemiSwing conditioner, low maintenance cutterbar, independent active suspension, swath belt and FlipOver widespreading, EXTRA 900 series machines are ready to meet every request with exceptional performance.

Tough and Reliable In Every Situation

Being prepared when mowing needs to take place is essential. Our machines are designed to offer maximum productivity and in addition we have a global support network standing by, dedicated to helping you do more, so you can make the most of the time available.



Centre Pivot Drawbar
The EXTRA 900CT and 900CR models are supplied with a centre pivot drawbar for mowing both to the right and left sides of the tractor.

This important advantage in mower design allows mowing a field in one continuous process, without the need for constantly opening up new 'lands'. Consequently time consuming short runs are eliminated and mowing capacity is increased.

The mower can be operated on either side of the tractor...



... which saves valuable time.



As is the output of the following machinery, as you can prevent creation of triangular or add shaped plots.

Turning on headlands is much easier, because the hydraulically operated drawbar allows the turning circle to be significantly reduced, saving time and reducing the number of instances where cut crop is driven over.



Fixed mainframe and reduced number of moving parts – less maintenance and wear.



The swivel hitch headstock with reversible gearbox provides optimal manoeuvring ability.



A lifting height of 500mm, ensures excellent ground clearance for transport and during headland turning.



Excellent Protection *of Ground and Machine*



Easy adjustment of stubble height.

Vicon Suspension for Clean Cutting Action

The EXTRA 900 series machines are engineered with the unique Vicon suspension concept. The complete mowing section, including the conditioner, is suspended independently from the main chassis by either two or four long adjustable suspension springs, allowing field tracks and contours to be closely followed.

If an obstacle is encountered in the field, the mowing section will lift up and backwards, protecting the cutterbar from damage. When the obstacle is passed, the mowing section automatically returns to the working position.

A simple crank adjusts the whole cutterbar assembly up or down to a desired stubble height. An optional hydraulic stubble height adjustment is available. Additional skids are available to increase cutting height.



The suspension springs allow the mower to closely follow ground contours in uneven conditions. The cutting section can adapt 500mm up and 150mm down.

Even Ground Pressure

The suspension springs are fitted on the widest possible position of the mowing section to ensure even ground pressure. Weight on ground is stable and only approx. 50-60kg on each side.



EXTRA 936 models are fitted with 4 suspension springs for accurate ground pressure.

Effective Protection against foreign Obstacles

The suspension rod is fitted between mowing section and mainframe. This ensures that distance between suspension rod and pushing arm is constant.

When an obstacle in the field is encountered, the mowing section will move backwards and automatically raise to allow the object to pass. The mower will automatically return to working position once the obstacle is navigated.



The suspension springs ensure excellent sideways adaptation of the complete mowing section.

Accurate Sideways Adaptation

The long spring design allows for excellent ground following ability. In uneven fields, the mower is able to adapt +500mm/-150mm.



Optional hydraulic stubble height adjustment for easy setting from tractor cab.



Hydraulically operated roller separation makes setting of pressure and distance of rollers effortless (option).



The special suspension rod ensures that the mowing section is automatically lifted upwards and above the object.



Widespreading *Or Swathing*

The Swath belt For Improved Performance

The EXTRA 900 series can be fitted with a versatile swath belt to place two swathes into one. In this way the large swathes for large foragers or balers can be prepared, to speed up the collection of the crop. The swath belt can be raised and lowered from the tractor seat during operation. This allows you to adapt to each individual situation and requirement, without wasting valuable time.

Adjustable belt Speed

The belt speed is infinitely adjustable from the cab. In this way, the swathes can be placed either side by side, or on the top of each other, ensuring a perfect match to the pick-up width of the following machine.



Setting EXTRA 900 series mowers for widespreading is very simple.



Changing from swathing to widespreading is a one-man job. Simply turn the rear plate 180°.



Dismount the two deflector doors and you are ready to mow.

Easy-To-Use Widespreading Kit
The EXTRA 900 series can be fitted with an easy-to-use widespreading kit. This enables the crop to be cut and spread in one operation, saving both time and at least one tedder operation.

The Spreading Plate
The spreading vanes are placed further back on the mowing unit than with conventional systems. This is thanks to the spreading plate positioned far to the rear when in use. The extended distance between the conditioning rotor and the spreading vanes enables a more even spreading across the entire working width, which in turn ensures a better wilting.



When placing the first swath, the belt is raised and hydraulically lowered for the second swath.



The crop is directed inwards, away from the unmown crop.

“ Changing from swathing to widespreading is a one-man job”

Original Parts & Service

We are here so you can focus on your crop

- 
- 1 Long lasting, high quality spare parts**
 - 2 Over 100 years of parts knowledge**
 - 3 Support from a wide network of dealers**
 - 4 24/7 spare parts service**
 - 5 Highly skilled dealer technicians**



“MYVICON
Connected farming, my way”

A personalised online platform tailored to your machine needs

With MYVICON you will benefit from easy access to Vicon’s online service tools. Receive first hand access to information on future developments and updates, operator and spare part manuals, FAQs and local VIP offers. All information is gathered in one place.



**REGISTER YOUR PRODUCT NOW:
MY.VICON.EU**

Facts

| Model EXTRA | Rear Mounted Mower Conditioners | | | | | | |
|-------------------------------------|---------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | 624T | 624T | 628T | 628T | 628R | 632T Farmer | 632T Farmer |
| Conditioner | Nylon Tines | SemiSwing | Nylon Tines | SemiSwing | Roller Cond. | Nylon Tines | SemiSwing |
| Dimensions & Weight | | | | | | | |
| Working width m(ft) | 2.42 (7'11") | 2.42 (7'11") | 2.84 (9'4") | 2.84 (9'4") | 2.84 (9'4") | 3.18 (10'5") | 3.18 (10'5") |
| Transport width m(ft) | 1.90 (6'3") | 1.90 (6'3") | 2.10 (6'11") | 2.10 (6'11") | 2.10 (6'11") | 3.00 (9'8") | 3.00 (9'8") |
| Weight appr. kg (lbs) | 1015(2238) | 1025(2260) | 1090(2403) | 1105(2437) | 1230(2712) | 1165(2569) | 1195(2635) |
| Attachment to tractor | | | | | | | |
| PTO (rpm) | 540/1000 | 540/1000 | 540/1000 | 540/1000 | 540/1000 | 540/1000 | 540/1000 |
| PTO power req. min (kW/hp) | 50/70 | 50/70 | 60/80 | 60/80 | 60/80 | 66/70 | 66/70 |
| No of hydr. outlets | 1D | 1D | 1D | 1D | 1D | 1D | 1D |
| Operation | | | | | | | |
| Number of discs | 6 | 6 | 8 | 8 | 8 | 8 | 8 |
| Stubble height (mm) | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 |
| Cond. rotor speed | 900/600 | 900/600 | 900/600 | 900/600 | 950 | 900/600 | 900/600 |
| Optional Equipment | | | | | | | |
| Wide Spreading Vanes | ● | ● | ● | ● | ● | ● | ● |
| FlipOver Wide Spreading | - | - | - | - | - | - | - |
| Swath Belt | - | - | - | - | - | - | - |
| High Skids 20/40/60/80 mm | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| Kit, Hydr. Adjust. of Ground Pres. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Throwing Wings for Difficult Crop | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| EXPRESS - Quick Change of Blades | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Foldable Side Guards | - | - | - | - | - | - | - |
| Dual Adjustment of Conditioner Hood | - | - | - | - | - | - | - |
| Hydraulic Stubble Height Adjustment | - | - | - | - | - | - | - |
| Hydraulic Roller Separation | - | - | - | - | - | - | - |

| Model EXTRA | Front Mounted Mower Conditioners | | | | | |
|---|----------------------------------|-------------|-------------|--------------|--------------|--------------|
| | 628FT | 628FT | 632FT | 632FT | 632FR | 635FT |
| Conditioner | Nylon Tines | SemiSwing | Nylon Tines | SemiSwing | Roller Cond. | SemiSwing |
| Dimensions & Weight | | | | | | |
| Working width m(ft) | 2.84(9'4") | 2.84 (9'4") | 3.18(10'5") | 3.18 (10'5") | 3.18 (10'5") | 3.50 (11'6") |
| Transport width m(ft) | 2.70(8'9") | 2.70 (8'9") | 3.00(9'8") | 3.00 (9'8") | 3.00 (9'8") | 3.40 (11'2") |
| Weight appr. kg (lbs) | 1115(2459) | 1160(2558) | 1155(2547) | 1250(2756) | 1320(2911) | 1475(3252) |
| Attachment to tractor | | | | | | |
| PTO (rpm) | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| PTO power req. min (kW/hp) | 50/70 | 50/70 | 50/70 | 50/70 | 60/80 | 66/90 |
| No of hydr. outlets | 1S | 1S | 1S | 1S | 1S | 1S |
| Operation | | | | | | |
| Number of discs | 8 | 8 | 8 | 8 | 8 | 10 |
| Stubble height (mm) | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 |
| Cond. rotor speed | 900/600 | 900/600 | 900/600 | 900/600 | 950 | 900/600 |
| Optional Equipment | | | | | | |
| Wide Spreading Vanes | - | - | - | - | - | - |
| FlipOver Wide Spreading | - | - | - | - | - | - |
| Swath Belt | - | - | - | - | - | - |
| High Skids 20/40/60/80 mm | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| Kit, Hydr. Adjust. of Ground Pres. | - | - | - | - | - | - |
| Throwing Wings for Difficult Crop | 0 | 0 | 0 | 0 | 0 | 0 |
| EXPRESS - Quick Change of Blades | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Foldable Side Guards | - | - | - | - | - | - |
| Dual Adjustment of Conditioner Hood | - | - | - | - | - | - |
| Hydraulic Stubble Height Adjustment | - | - | - | - | - | - |
| Hydraulic Roller Separation | - | - | - | - | - | - |
| ● Standard 0 Optional - Not available | | | | | | |

Rear Mounted Mower Conditioners

| 732T | 732R | 736T | 736T Vario |
|-----------|--------------|-----------|------------|
| SemiSwing | Roller Cond. | SemiSwing | SemiSwing |

| | | | |
|-------------|-------------|-------------|-------------|
| 3.18(10'5") | 3.18(10'5") | 3.50(11'6") | 3.50(11'6") |
| 3.00(9'8") | 3.00(9'8") | 3.00(9'8") | 3.00(9'8") |
| 1480(3263) | 1510(3330) | 1525(3363) | 1585(3495) |

| | | | |
|-------|-------|--------|--------|
| 1000 | 1000 | 1000 | 1000 |
| 66/90 | 66/90 | 90/120 | 90/120 |
| 2D | 2D | 2D | 3D |

| | | | |
|----------|-------|----------|----------|
| 8 | 8 | 10 | 10 |
| 30-60 | 30-60 | 30-60 | 30-60 |
| 1000/700 | 950 | 1000/700 | 1000/700 |

| | | | |
|---------|---------|---------|---------|
| 0 | 0 | 0 | - |
| 0 | 0 | 0 | ● |
| - | - | - | - |
| 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| - | - | - | - |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| ● | ● | ● | ● |
| - | - | - | - |
| - | - | - | - |

Front Mounted Mower Conditioners

| 732FT | 732FR | 736FT | 736FR |
|-----------|--------------|-----------|--------------|
| SemiSwing | Roller Cond. | SemiSwing | Roller Cond. |

| | | | |
|--------------|--------------|--------------|--------------|
| 3.18 (10'5") | 3.18 (10'5") | 3.50 (11'6") | 3.50 (11'6") |
| 3.00 (9'8") | 3.00 (9'8") | 3.35 (11') | 3.35 (11') |
| 1250(2756) | 1340(2955) | 1385(3054) | 1445(3186) |

| | | | |
|-------|-------|-------|-------|
| 1000 | 1000 | 1000 | 1000 |
| 56/75 | 56/75 | 60/80 | 60/80 |
| 1S | 1S | 1S | 1S |

| | | | |
|-------|-------|-------|-------|
| 8 | 8 | 10 | 10 |
| 30-60 | 30-60 | 30-60 | 30-60 |
| 1000 | 950 | 1000 | 950 |

| | | | |
|---------|---------|---------|---------|
| - | - | - | - |
| - | - | - | - |
| - | - | - | - |
| 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| - | - | - | - |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| 0 (1D) | 0 (1D) | 0 (1D) | 0 (1D) |
| ● | ● | ● | ● |
| - | - | - | - |
| - | - | - | - |

Facts

| Model EXTRA | Triple Mower Conditioners | | | | | | |
|--------------------------------------|---------------------------|--------------|--------------|--------------|--------------|-------------|-------------|
| | 687T | 687T | 787T | 787R | 787T BX | 795T | 795T BX |
| Drawbar | - | - | - | - | - | - | - |
| Conditioner | Nylon Tines | SemiSwing | SemiSwing | Roller Cond. | SemiSwing | SemiSwing | SemiSwing |
| Dimensions & Weight | | | | | | | |
| Working width m(ft) | 8.75 (28'9") | 8.75 (28'9") | 8.75 (28'9") | 8.75 (28'9") | 8.75 (28'9") | 9.5 (31'2") | 9.5 (31'2") |
| Transport width m(ft) | 3.00 (9'8") | 3.00 (9'8") | 2.8 (9'2") | 2.8 (9'2") | 2.8 (9'2") | 2.8 (9'2") | 2.8 (9'2") |
| Weight appr. kg (lbs) | 2245 (4950) | 2375 (5237) | 3015 (6648) | 3075 (6780) | 3575 (7883) | 3160 (6968) | 3775 (8324) |
| Attachment to tractor | | | | | | | |
| PTO (rpm) | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| - swivel hitch drawbar | - | - | - | - | - | - | - |
| PTO power req. min (kW/hp) | 110/150 | 110/150 | 132/180 | 132/180 | 154/210 | 155/210 | 180/240 |
| No of hydr. outlets | 2D | 2D | 2D | 2D | 2D, 1S, 1FR | 2D | 2D, 1S, 1FR |
| Operation | | | | | | | |
| Number of discs | 2x8 | 2x8 | 2x8 | 2x8 | 2x8 | 2x10 | 2x10 |
| Stubble height (mm) | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 |
| Cond. rotor speed | 900/600 | 900/600 | 550/1000 | 1000 | 550/1000 | 550/1000 | 550/1000 |
| Tyres | - | - | - | - | - | - | - |
| Isobus Compatibility | - | - | - | - | - | - | - |
| Non-Isobus Portus Joystick | - | - | - | - | - | - | - |
| Isobus Portus Joystick | - | - | - | - | - | - | - |
| IsoMatch Tellus, Tellus Pro, Go, Go+ | - | - | - | - | - | - | - |
| Optional Equipment | | | | | | | |
| Wide Spreading Vanes | ● | ● | 0 | 0 | 0 | 0 | 0 |
| FlipOver Wide Spreading | - | - | 0 | 0 | 0 | 0 | 0 |
| Swath Belt | - | - | 0 | 0 | ● | 0 | ● |
| High Skids 20/40/60/80 mm | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| Kit, Hydr. Adjust. of Ground Pres. | 0 | 0 | - | - | - | - | - |
| Throwing Wings for Difficult Crop | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| EXPRESS - Quick Change of Blades | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Foldable Side Guards | - | - | 0 | 0 | 0 | 0 | 0 |
| Dual adjustment of conditioner hood | - | - | ● | - | ● | ● | ● |
| Hydraulic Stubble Height Adjustment | - | - | - | - | - | - | - |
| Hydraulic Roller Separation | - | - | - | - | - | - | - |

● Standard 0 Optional - Not available

Triple Mower Conditioners

| 7110T | 7110R | 7110T BX | 7110R BX |
|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| - | - | - | - |
| SemiSwing | Roller Cond. | SemiSwing | Roller Cond. |
| 9.80/10.20 (32'2"/33'5") | 9.80/10.20 (32'2"/33'5") | 9.80/10.20 (32'2"/33'5") | 9.80/10.20 (32'2"/33'5") |
| 2.90(9'6") | 2.90(9'6") | 2.90(9'6") | 2.90(9'6") |
| 3200(7055) | 3340(7363) | 3815(8412) | 3955(8721) |
| 1000 | 1000 | 1000 | 1000 |
| - | - | - | - |
| 155/210 | 155/210 | 180/240 | 180/240 |
| LS | LS | LS | LS |
| 2x10 | 2x10 | 2x10 | 2x10 |
| 30-60 | 30-60 | 30-60 | 30-60 |
| 1000/700 | 950 | 1000/700 | 950 |
| - | - | - | - |
| ● | ● | ● | ● |
| 0 | 0 | - | - |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| - | - | - | - |
| ● | ● | ● | ● |
| 0 | 0 | ● | ● |
| 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| - | - | - | - |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 |
| ● | ● | ● | ● |
| - | - | - | - |
| - | - | - | - |

Facts


| Model EXTRA | Trailed Mower Conditioners | | | | | |
|--------------------------------------|----------------------------|-------------|--------------|--------------|--------------|--------------|
| | 924T | 928T | 932T | 932CT | 932R | 932CR |
| Drawbar | Left hand | Left hand | Left hand | Centre pivot | Left hand | Centre pivot |
| Conditioner | SemiSwing | SemiSwing | SemiSwing | SemiSwing | Roller Cond. | Roller Cond. |
| Dimensions & Weight | | | | | | |
| Working width m(ft) | 2.42 (7'11") | 2.84 (9'4") | 3.18 (10'5") | 3.18 (10'5") | 3.18 (10'5") | 3.18 (10'5") |
| Transport width m(ft) | 2.20 (7'3") | 2.70 (8'9") | 3.00 (9'8") | 3.00 (9'8") | 3.00 (9'8") | 3.00 (9'8") |
| Weight appr. kg (lbs) | 1695(3737) | 1975(4355) | 2115(4553) | 2370(5226) | 2185(4818) | 2450(5402) |
| Attachment to tractor | | | | | | |
| PTO (rpm) | 540/1000 | 540/1000 | 540/1000 | 540/1000 | 540/1000 | 540/1000 |
| - swivel hitch drawbar | ● | ● | ● | ● | ● | ● |
| PTO power req. min (kW/hp) | 45/60 | 50/70 | 60/80 | 60/80 | 60/80 | 60/80 |
| No of hydr. outlets | - | - | - | - | - | - |
| Operation | | | | | | |
| Number of discs | 6 | 8 | 8 | 8 | 8 | 8 |
| Stubble height (mm) | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 | 30-60 |
| Cond. rotor speed | 900/600 | 900/600 | 900/600 | 900/600 | 950 | 950 |
| Tyres | 10.0/75-15.3 8PR | 380/55-17 | 380/55-17 | 380/55-17 | 380/55-17 | 380/55-17 |
| Isobus Compatibility | - | - | - | - | - | - |
| Non-Isobus Portus Joystick | - | - | - | - | - | - |
| Isobus Portus Joystick | - | - | - | - | - | - |
| IsoMatch Tellus, Tellus Pro, Go, Go+ | - | - | - | - | - | - |
| Optional Equipment | | | | | | |
| Wide Spreading Vanes | - | - | - | - | - | - |
| FlipOver Wide Spreading | 0 | 0 | 0 | 0 | 0 | 0 |
| Swath Belt | - | 0 | 0 | 0 | - | - |
| High Skids 20/40/60/80 mm | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| Kit, Hydr. Adjust. of Ground Pres. | - | - | - | - | - | - |
| Throwing Wings for Difficult Crop | 0 | 0 | 0 | 0 | 0 | 0 |
| EXPRESS - Quick Change of Blades | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Foldable Side Guards | - | - | - | - | - | - |
| Dual adjustment of conditioner hood | - | - | - | - | - | - |
| Hydraulic Stubble Height Adjustment | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydraulic Roller Separation | 0 | 0 | 0 | 0 | 0 | 0 |

● Standard 0 Optional - Not available

| Trailed Mower Conditioners | | |
|----------------------------|--------------|--------------|
| 936T | 936R | 936CT |
| Left hand | Left hand | Centre pivot |
| SemiSwing | Roller Cond. | SemiSwing |
| 3.50 (11'5") | 3.50 (11'5") | 3.50 (11'5") |
| 3.40 (11'2") | 3.40 (11'2") | 3.40 (11'2") |
| 2150(4741) | 2240(4939) | 2450(5402) |
| 540/1000 | 540/1000 | 540/1000 |
| ● | ● | ● |
| 70/90 | 70/90 | 70/90 |
| - | - | - |
| 10 | 10 | 10 |
| 30-60 | 30-60 | 30-60 |
| 900/600 | 950 | 900/600 |
| 380/55-17 | 380/55-17 | 380/55-17 |
| - | - | - |
| - | - | - |
| - | - | - |
| - | - | - |
| 0 | 0 | 0 |
| 0 | - | 0 |
| 0/0/0/0 | 0/0/0/0 | 0/0/0/0 |
| - | - | - |
| 0 | 0 | 0 |
| 0 | 0 | 0 |
| - | - | - |
| - | - | - |
| 0 | 0 | 0 |
| 0 | 0 | 0 |

design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant.
 ® = trade mark protection in the EU. © Kverneland Group Kerteminde AS

Proud History of Ground Breaking Innovations

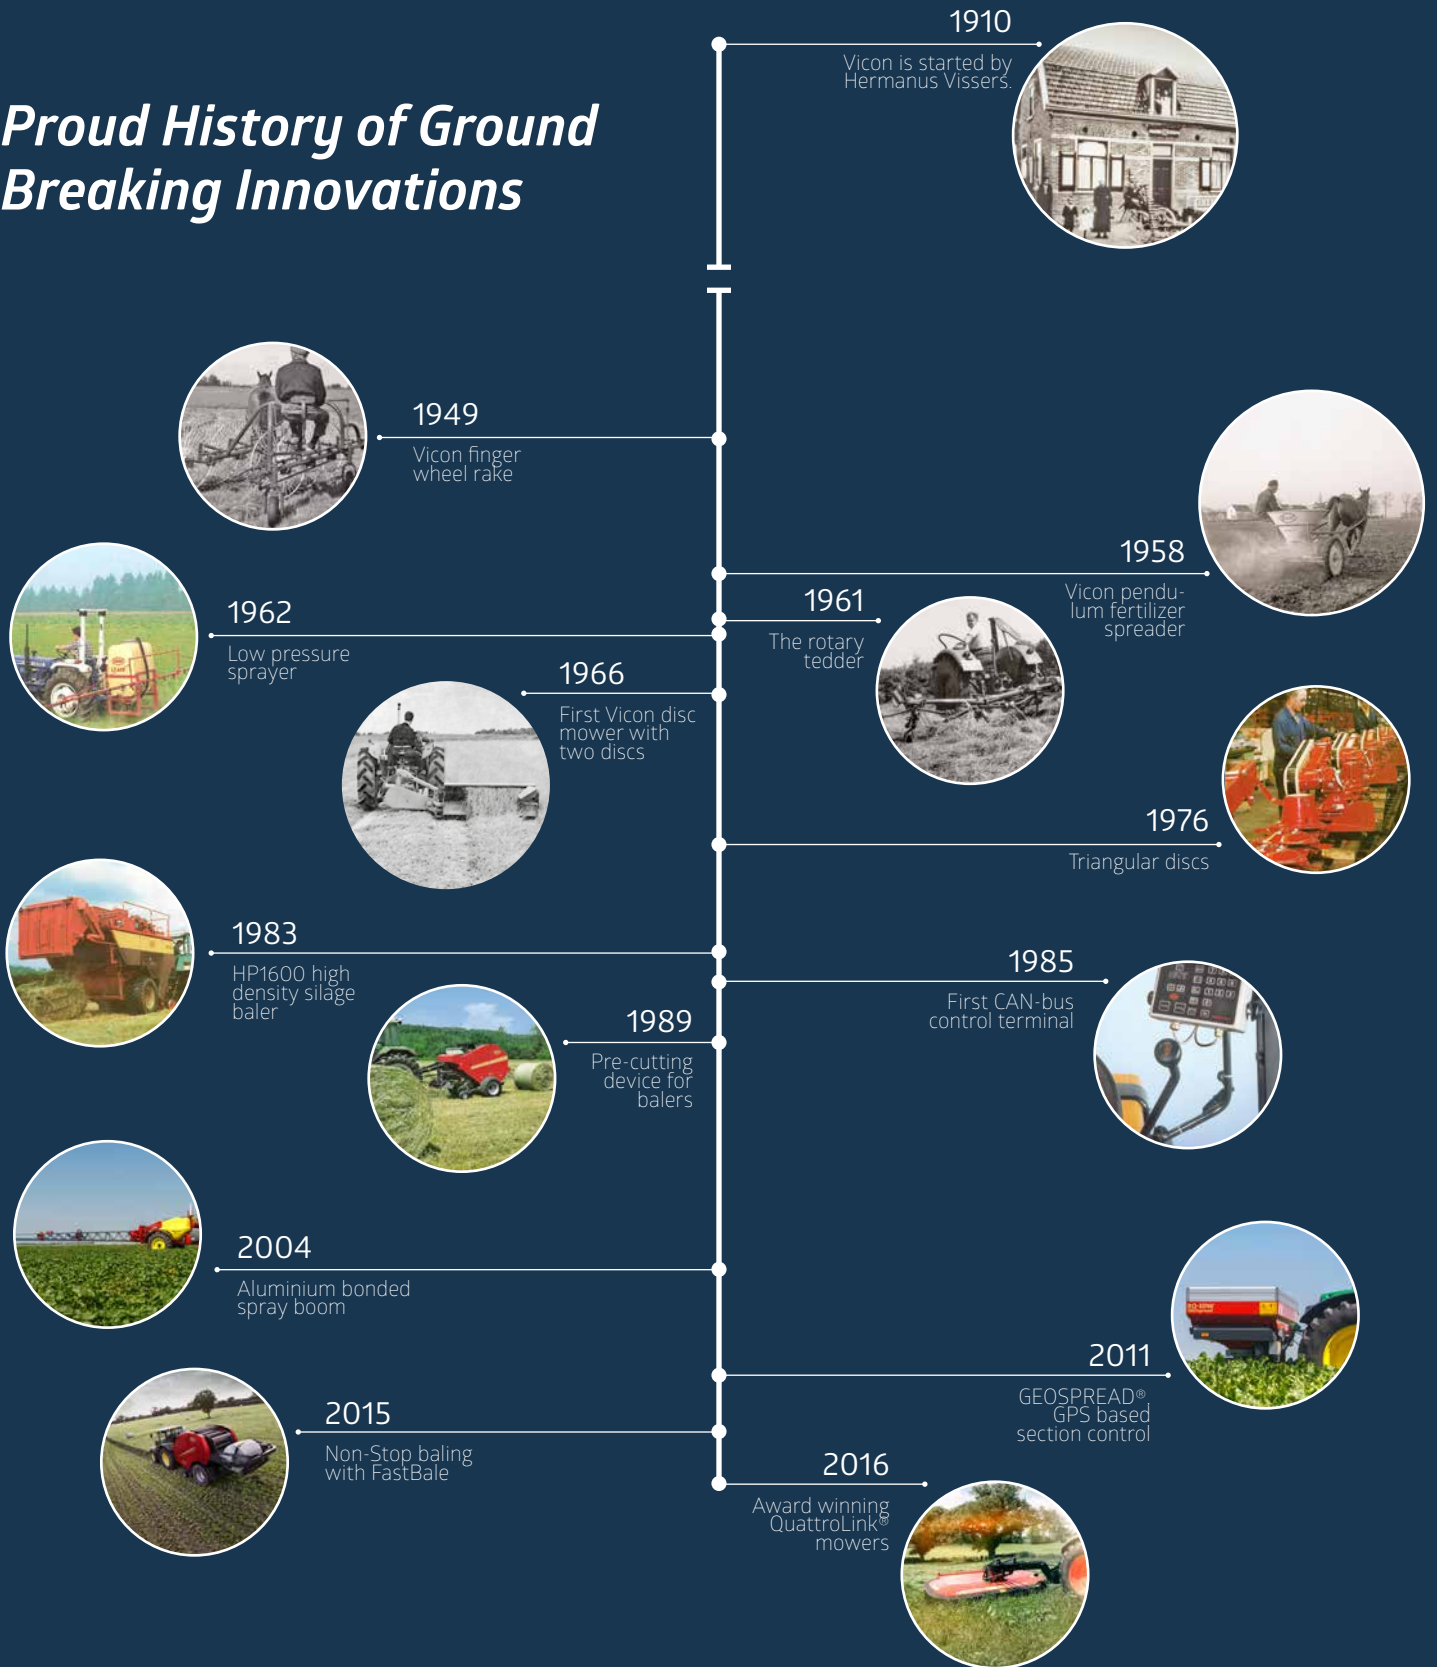

My way of Farming!



www.vicon.eu